


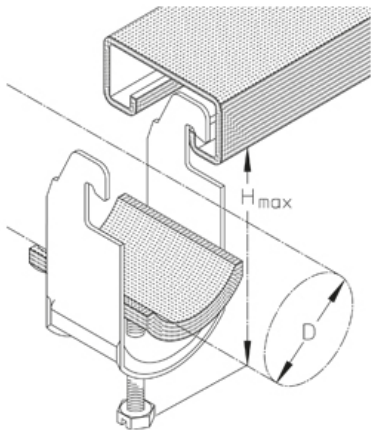

AC-IW

cable clamp with additional insulating vat for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel and additional insulating vat made of polystyrene. For fastening to C-profile rails (C+, C60°) with a slot size of 18/22 mm.

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 AC-IW	8-12 mm	42.50 mm	2 Nm	1	2.80 kg/100	
16 AC-IW	12-16 mm	47.50 mm	2 Nm	1	3.20 kg/100	
20 AC-IW	16-20 mm	51.50 mm	2 Nm	1	3.60 kg/100	
24 AC-IW	20-24 mm	55.70 mm	2 Nm	1	4.20 kg/100	
28 AC-IW	24-28 mm	59.70 mm	2 Nm	1	4.50 kg/100	
32 AC-IW	28-32 mm	65 mm	2 Nm	1	7.10 kg/100	
36 AC-IW	32-36 mm	69 mm	2 Nm	1	7.50 kg/100	
40 AC-IW	36-40 mm	73 mm	2 Nm	1	8.20 kg/100	
44 AC-IW	40-44 mm	83 mm	4 Nm	1	10.20 kg/100	
48 AC-IW	44-48 mm	87 mm	4 Nm	1	10.60 kg/100	
52 AC-IW	48-52 mm	92.50 mm	4 Nm	1	11.60 kg/100	
56 AC-IW	52-56 mm	96.50 mm	4 Nm	1	12.20 kg/100	
60 AC-IW	56-60 mm	100.50 mm	4 Nm	1	15.90 kg/100	
64 AC-IW	60-64 mm	104.50 mm	4 Nm	1	17.50 kg/100	
70 AC-IW	64-70 mm	111.50 mm	4 Nm	1	18.60 kg/100	

Product: Product

diameter: diameter




Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

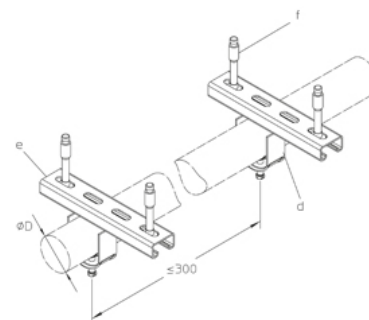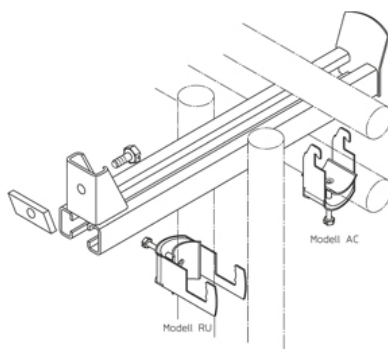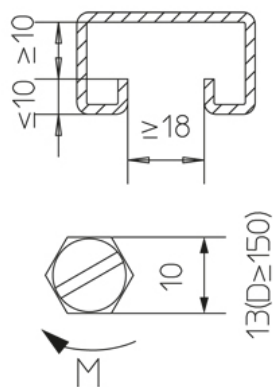

ACCESSORIES

A 2, A 4, A 7, A 8, A 9, KHA 21, A 41, KHA 41,

