


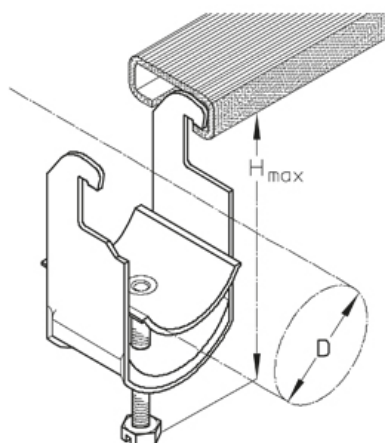

ACF-E

cable clamp for fastening to C-profile rails

Cable clamp with full-surface vat made of high-grade steel. For fastening to C-profile rails (C) with a slot size > 10 mm.

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 ACF-E	8-12 mm	41 mm	2 Nm	1	2.40 kg/100	
16 ACF-E	12-16 mm	46 mm	2 Nm	1	2.80 kg/100	
20 ACF-E	16-20 mm	50 mm	2 Nm	1	3.10 kg/100	
24 ACF-E	20-24 mm	54 mm	2 Nm	1	3.50 kg/100	
28 ACF-E	24-28 mm	58 mm	2 Nm	1	3.90 kg/100	
32 ACF-E	28-32 mm	63 mm	2 Nm	1	4.90 kg/100	
36 ACF-E	32-36 mm	67 mm	2 Nm	1	5.80 kg/100	
40 ACF-E	36-40 mm	71 mm	2 Nm	1	6.50 kg/100	
44 ACF-E	40-44 mm	81 mm	4 Nm	1	7.40 kg/100	
48 ACF-E	44-48 mm	85 mm	4 Nm	1	8.90 kg/100	
52 ACF-E	48-52 mm	90 mm	4 Nm	1	9.90 kg/100	
56 ACF-E	52-56 mm	94 mm	4 Nm	1	10.20 kg/100	
12/2 ACF-E	8-12 mm	58 mm	2 Nm	2	3.10 kg/100	
16/2 ACF-E	12-16 mm	67 mm	2 Nm	2	3.70 kg/100	
20/2 ACF-E	16-20 mm	75 mm	2 Nm	2	4.20 kg/100	
24/2 ACF-E	20-24 mm	84 mm	2 Nm	2	4.80 kg/100	
28/2 ACF-E	24-28 mm	92 mm	2 Nm	2	5.50 kg/100	
32/2 ACF-E	28-32 mm	101 mm	2 Nm	2	7.30 kg/100	
36/2 ACF-E	32-36 mm	109 mm	2 Nm	2	8.10 kg/100	
40/2 ACF-E	36-40 mm	117 mm	2 Nm	2	9.40 kg/100	
44/2 ACF-E	40-44 mm	127 mm	4 Nm	2	11.70 kg/100	
48/2 ACF-E	44-48 mm	135 mm	4 Nm	2	12.80 kg/100	
52/2 ACF-E	48-52 mm	144 mm	4 Nm	2	13.80 kg/100	
56/2 ACF-E	52-56 mm	152 mm	4 Nm	2	15.40 kg/100	

Product: Product

diameter: diameter



Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

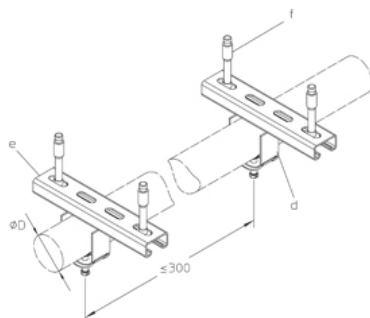

ACCESSORIES

A 2, A 4, A 7, A 8, A 9, KHA 21, A 41, B 3, B 6, KHA 41,

