


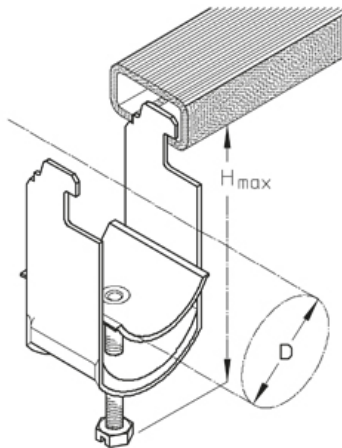

B

cable clamp for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel. For fastening to C-profile rails (C) with a slot size of 11 mm.

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 B	8-12 mm	41 mm	2 Nm	1	2.50 kg/100	
16 B	12-16 mm	46 mm	2 Nm	1	2.80 kg/100	
20 B	16-20 mm	50 mm	2 Nm	1	3.20 kg/100	
24 B	20-24 mm	54 mm	2 Nm	1	3.50 kg/100	
28 B	24-28 mm	58 mm	2 Nm	1	3.90 kg/100	
32 B	28-32 mm	63 mm	2 Nm	1	6.10 kg/100	
36 B	32-36 mm	67 mm	2 Nm	1	6.60 kg/100	
40 B	36-40 mm	71 mm	2 Nm	1	7.90 kg/100	
44 B	40-44 mm	81 mm	4 Nm	1	9.20 kg/100	
48 B	44-48 mm	85 mm	4 Nm	1	9.70 kg/100	
52 B	48-52 mm	90 mm	4 Nm	1	10.70 kg/100	
56 B	52-56 mm	94 mm	4 Nm	1	11.40 kg/100	
60 B	56-60 mm	98 mm	4 Nm	1	14.10 kg/100	
64 B	60-64 mm	102 mm	4 Nm	1	15 kg/100	
70 B	64-70 mm	109 mm	4 Nm	1	16.80 kg/100	
12/2 B	8-12 mm	58 mm	2 Nm	2	3.30 kg/100	
16/2 B	12-16 mm	67 mm	2 Nm	2	4 kg/100	
20/2 B	16-20 mm	75 mm	2 Nm	2	4.70 kg/100	
24/2 B	20-24 mm	84 mm	2 Nm	2	5.20 kg/100	
28/2 B	24-28 mm	92 mm	2 Nm	2	5.70 kg/100	
32/2 B	28-32 mm	101 mm	2 Nm	2	8.60 kg/100	
36/2 B	32-36 mm	109 mm	2 Nm	2	9.30 kg/100	
40/2 B	36-40 mm	117 mm	2 Nm	2	9.90 kg/100	
44/2 B	40-44 mm	127 mm	4 Nm	2	13.20 kg/100	
48/2 B	44-48 mm	135 mm	4 Nm	2	13.90 kg/100	
52/2 B	48-52 mm	144 mm	4 Nm	2	14.80 kg/100	
56/2 B	52-56 mm	152 mm	4 Nm	2	15.60 kg/100	

diameter: diameter



Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

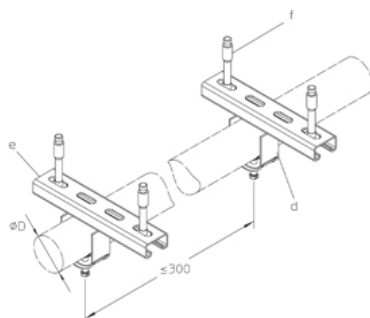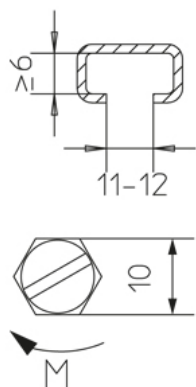

ACCESSORIES

B 3, B 6,

