


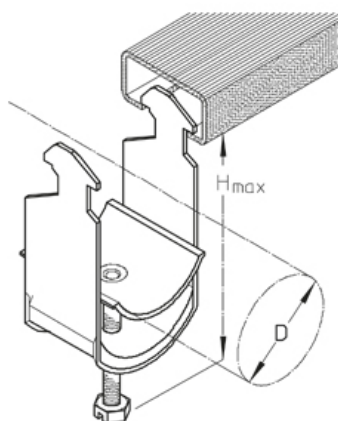

H

cable clamp for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel. For fastening to C-profile rails (C) with a slot size of 16 mm. certified according to DIN 4102-12

Articles with a diameter of 12-56mm are also available in stainless steel finish, material No. 1.4571 / 1.4404 (V4A).

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 H	8-12 mm	41 mm	2 Nm	1	2.70 kg/100	
16 H	12-16 mm	46 mm	2 Nm	1	3.20 kg/100	
20 H	16-20 mm	50 mm	2 Nm	1	3.60 kg/100	
24 H	20-24 mm	54 mm	2 Nm	1	3.90 kg/100	
28 H	24-28 mm	58 mm	2 Nm	1	4.40 kg/100	
32 H	28-32 mm	63 mm	2 Nm	1	6.30 kg/100	
36 H	32-36 mm	67 mm	2 Nm	1	7 kg/100	
40 H	36-40 mm	71 mm	2 Nm	1	7.50 kg/100	
44 H	40-44 mm	81 mm	4 Nm	1	9.80 kg/100	
48 H	44-48 mm	85 mm	4 Nm	1	10.20 kg/100	
52 H	48-52 mm	90 mm	4 Nm	1	10.60 kg/100	
56 H	52-56 mm	94 mm	4 Nm	1	11.30 kg/100	
60 H	56-60 mm	98 mm	4 Nm	1	15.80 kg/100	
64 H	60-64 mm	102 mm	4 Nm	1	16.50 kg/100	
70 H	64-70 mm	109 mm	4 Nm	1	17.10 kg/100	
12/2 H	8-12 mm	58 mm	2 Nm	2	3.50 kg/100	
16/2 H	12-16 mm	67 mm	2 Nm	2	4 kg/100	
20/2 H	16-20 mm	75 mm	2 Nm	2	4.80 kg/100	
24/2 H	20-24 mm	84 mm	2 Nm	2	5.30 kg/100	
28/2 H	24-28 mm	92 mm	2 Nm	2	6 kg/100	
32/2 H	28-32 mm	101 mm	2 Nm	2	8.90 kg/100	
36/2 H	32-36 mm	109 mm	2 Nm	2	9.60 kg/100	
40/2 H	36-40 mm	117 mm	2 Nm	2	10.80 kg/100	
44/2 H	40-44 mm	127 mm	4 Nm	2	13.30 kg/100	
48/2 H	44-48 mm	135 mm	4 Nm	2	13.90 kg/100	
52/2 H	48-52 mm	144 mm	4 Nm	2	15.20 kg/100	
56/2 H	52-56 mm	152 mm	4 Nm	2	16.20 kg/100	

Aluminium

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 H-AL	8-12 mm	41 mm	1.50 Nm	1	2.10 kg/100	
16 H-AL	12-16 mm	46 mm	1.50 Nm	1	2.50 kg/100	
20 H-AL	16-20 mm	50 mm	1.50 Nm	1	2.90 kg/100	
24 H-AL	20-24 mm	54 mm	1.50 Nm	1	3.30 kg/100	
28 H-AL	24-28 mm	58 mm	1.50 Nm	1	3.60 kg/100	
32 H-AL	28-32 mm	63 mm	1.50 Nm	1	5 kg/100	
36 H-AL	32-36 mm	67 mm	1.50 Nm	1	5.50 kg/100	
40 H-AL	36-40 mm	71 mm	1.50 Nm	1	5.90 kg/100	
44 H-AL	40-44 mm	81 mm	3 Nm	1	7.60 kg/100	
48 H-AL	44-48 mm	85 mm	3 Nm	1	8.30 kg/100	
52 H-AL	48-52 mm	90 mm	3 Nm	1	10.20 kg/100	
56 H-AL	52-56 mm	94 mm	3 Nm	1	10.60 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 H-E	8-12 mm	41 mm	2 Nm	1	2.70 kg/100	
16 H-E	12-16 mm	46 mm	2 Nm	1	3.20 kg/100	
20 H-E	16-20 mm	50 mm	2 Nm	1	3.60 kg/100	
24 H-E	20-24 mm	54 mm	2 Nm	1	3.90 kg/100	
28 H-E	24-28 mm	58 mm	2 Nm	1	4.40 kg/100	
32 H-E	28-32 mm	63 mm	2 Nm	1	5.40 kg/100	
36 H-E	32-36 mm	67 mm	2 Nm	1	6.10 kg/100	
40 H-E	36-40 mm	71 mm	2 Nm	1	6.50 kg/100	
44 H-E	40-44 mm	81 mm	4 Nm	1	8.70 kg/100	
48 H-E	44-48 mm	85 mm	4 Nm	1	9 kg/100	
52 H-E	48-52 mm	90 mm	4 Nm	1	9.30 kg/100	
56 H-E	52-56 mm	94 mm	4 Nm	1	9.90 kg/100	
12/2 H-E	8-12 mm	58 mm	2 Nm	2	3.50 kg/100	
16/2 H-E	12-16 mm	67 mm	2 Nm	2	4 kg/100	
20/2 H-E	16-20 mm	75 mm	2 Nm	2	4.80 kg/100	
24/2 H-E	20-24 mm	84 mm	2 Nm	2	5.30 kg/100	
28/2 H-E	24-28 mm	92 mm	2 Nm	2	6 kg/100	
32/2 H-E	28-32 mm	101 mm	2 Nm	2	7.70 kg/100	

Product: Product

diameter: diameter



Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

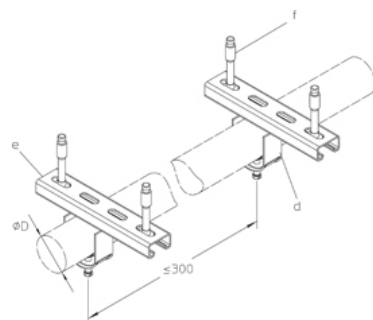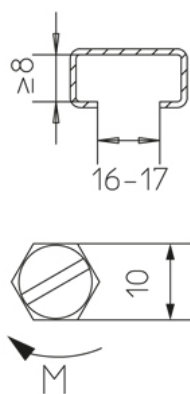

ACCESSORIES

В 7, КНВ 7,

