


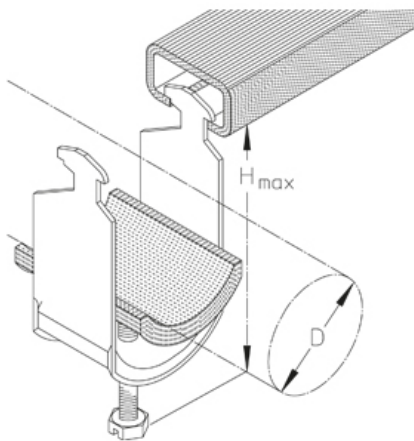

HB-IW

cable clamp with additional insulating vat for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel and additional insulating vat made of polystyrene. For fastening to C-profile rails (C) with a slot size of 11 mm.

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 HB-IW	8-12 mm	42.50 mm	2 Nm	1	2.70 kg/100	
16 HB-IW	12-16 mm	47.50 mm	2 Nm	1	3 kg/100	
20 HB-IW	16-20 mm	51.50 mm	2 Nm	1	3.40 kg/100	
24 HB-IW	20-24 mm	55.70 mm	2 Nm	1	4 kg/100	
28 HB-IW	24-28 mm	59.70 mm	2 Nm	1	4.50 kg/100	
32 HB-IW	28-32 mm	65 mm	2 Nm	1	6.20 kg/100	
36 HB-IW	32-36 mm	69 mm	2 Nm	1	7.10 kg/100	
40 HB-IW	36-40 mm	73 mm	2 Nm	1	7.90 kg/100	
44 HB-IW	40-44 mm	83 mm	4 Nm	1	9.90 kg/100	
48 HB-IW	44-48 mm	87 mm	4 Nm	1	10.10 kg/100	
52 HB-IW	48-52 mm	92.50 mm	4 Nm	1	11.10 kg/100	
56 HB-IW	52-56 mm	96.50 mm	4 Nm	1	11.70 kg/100	
60 HB-IW	56-60 mm	100.50 mm	4 Nm	1	15.40 kg/100	
64 HB-IW	60-64 mm	104.50 mm	4 Nm	1	16.10 kg/100	
70 HB-IW	64-70 mm	111.50 mm	4 Nm	1	17.80 kg/100	

Product: Product

diameter: diameter



Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

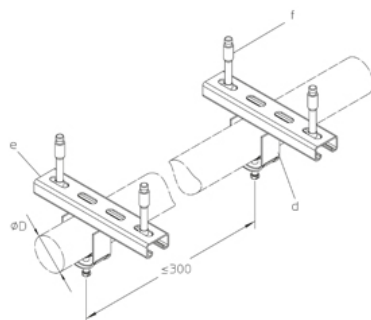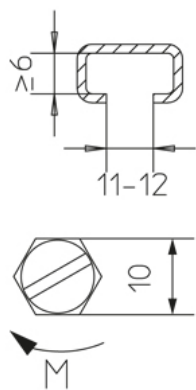

B 3, B 6,

