


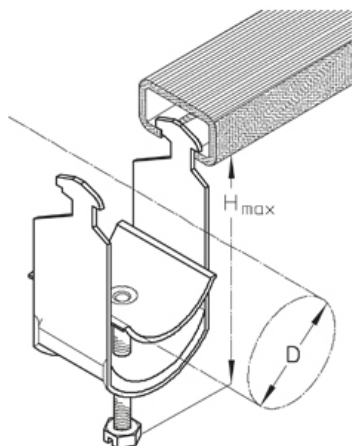

HB

cable clamp for fastening to C-profile rails

Cable clamp with full-surface vat made of galvanised steel. For fastening to C-profile rails (C) with a slot size of 11 mm.

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 HB	8-12 mm	41 mm	2 Nm	1	2.50 kg/100	
16 HB	12-16 mm	46 mm	2 Nm	1	2.80 kg/100	
20 HB	16-20 mm	50 mm	2 Nm	1	3.20 kg/100	
24 HB	20-24 mm	54 mm	2 Nm	1	3.80 kg/100	
28 HB	24-28 mm	58 mm	2 Nm	1	4.10 kg/100	
32 HB	28-32 mm	63 mm	2 Nm	1	5.80 kg/100	
36 HB	32-36 mm	67 mm	2 Nm	1	6.70 kg/100	
40 HB	36-40 mm	71 mm	2 Nm	1	7.40 kg/100	
44 HB	40-44 mm	81 mm	4 Nm	1	9.30 kg/100	
48 HB	44-48 mm	85 mm	4 Nm	1	9.80 kg/100	
52 HB	48-52 mm	90 mm	4 Nm	1	10.40 kg/100	
56 HB	52-56 mm	94 mm	4 Nm	1	11.10 kg/100	
60 HB	56-60 mm	98 mm	4 Nm	1	14.70 kg/100	
64 HB	60-64 mm	102 mm	4 Nm	1	15.40 kg/100	
70 HB	64-70 mm	109 mm	4 Nm	1	17.10 kg/100	
12/2 HB	8-12 mm	58 mm	2 Nm	2	3.20 kg/100	
16/2 HB	12-16 mm	67 mm	2 Nm	2	3.90 kg/100	
20/2 HB	16-20 mm	75 mm	2 Nm	2	4.40 kg/100	
24/2 HB	20-24 mm	84 mm	2 Nm	2	5.10 kg/100	
28/2 HB	24-28 mm	92 mm	2 Nm	2	5.70 kg/100	
32/2 HB	28-32 mm	101 mm	2 Nm	2	8.70 kg/100	
36/2 HB	32-36 mm	109 mm	2 Nm	2	9.80 kg/100	
40/2 HB	36-40 mm	117 mm	2 Nm	2	10.50 kg/100	
44/2 HB	40-44 mm	127 mm	4 Nm	2	12.90 kg/100	
48/2 HB	44-48 mm	135 mm	4 Nm	2	13.50 kg/100	
52/2 HB	48-52 mm	144 mm	4 Nm	2	13.70 kg/100	
56/2 HB	52-56 mm	152 mm	4 Nm	2	16.10 kg/100	

Aluminium

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 HB-AL	8-12 mm	41 mm	1.50 Nm	1	1.70 kg/100	
16 HB-AL	12-16 mm	46 mm	1.50 Nm	1	1.90 kg/100	
20 HB-AL	16-20 mm	50 mm	1.50 Nm	1	2.50 kg/100	
24 HB-AL	20-24 mm	54 mm	1.50 Nm	1	2.90 kg/100	
28 HB-AL	24-28 mm	58 mm	1.50 Nm	1	3.20 kg/100	
32 HB-AL	28-32 mm	63 mm	1.50 Nm	1	4.20 kg/100	
36 HB-AL	32-36 mm	67 mm	1.50 Nm	1	4.50 kg/100	
40 HB-AL	36-40 mm	71 mm	1.50 Nm	1	4.80 kg/100	
44 HB-AL	40-44 mm	81 mm	3.00 Nm	1	6.40 kg/100	
48 HB-AL	44-48 mm	85 mm	3.00 Nm	1	7 kg/100	
52 HB-AL	48-52 mm	90 mm	3.00 Nm	1	9.80 kg/100	
56 HB-AL	52-56 mm	94 mm	3.00 Nm	1	10.40 kg/100	

Product: Product

diameter: diameter



Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

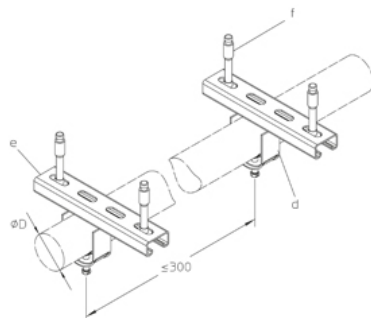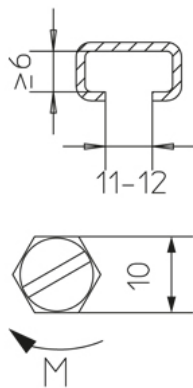

ACCESSORIES

B 3, B 6,

