


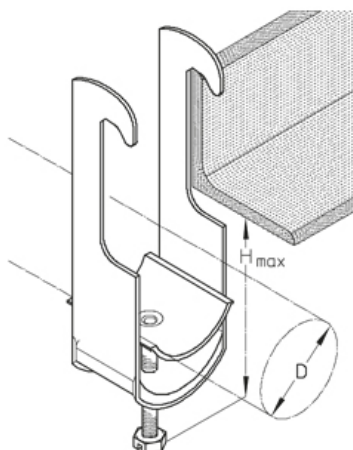

S

cable clamp for fastening to angle profiles

Cable clamp with full-surface vat made of galvanised steel. For fastening to angle profiles with a side length of up to max. 43 mm.

Articles with a diameter of 12-56mm are also available in stainless steel finish, material No. 1.4571 / 1.4404 (V4A).

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 S	8-12 mm	41 mm	2 Nm	1	3.60 kg/100	
16 S	12-16 mm	46 mm	2 Nm	1	4.10 kg/100	
20 S	16-20 mm	50 mm	2 Nm	1	4.60 kg/100	
24 S	20-24 mm	54 mm	2 Nm	1	4.80 kg/100	
28 S	24-28 mm	58 mm	2 Nm	1	5.30 kg/100	
32 S	28-32 mm	63 mm	2 Nm	1	7.90 kg/100	
36 S	32-36 mm	67 mm	2 Nm	1	8.40 kg/100	
40 S	36-40 mm	71 mm	2 Nm	1	9 kg/100	
44 S	40-44 mm	81 mm	4 Nm	1	11.20 kg/100	
48 S	44-48 mm	85 mm	4 Nm	1	11.70 kg/100	
52 S	48-52 mm	90 mm	4 Nm	1	12.40 kg/100	
56 S	52-56 mm	94 mm	4 Nm	1	12.90 kg/100	
60 S	56-60 mm	98 mm	4 Nm	1	17.20 kg/100	
64 S	60-64 mm	102 mm	4 Nm	1	17.70 kg/100	
70 S	64-70 mm	109 mm	4 Nm	1	18.60 kg/100	
76 S	70-76 mm	113 mm	4 Nm	1	25.30 kg/100	
82 S	76-82 mm	119 mm	4 Nm	1	28.50 kg/100	
88 S	82-88 mm	125 mm	4 Nm	1	29.40 kg/100	
94 S	88-94 mm	131 mm	4 Nm	1	33.20 kg/100	
100 S	94-100 mm	137 mm	4 Nm	1	34.80 kg/100	
110 S	100-110 mm	157 mm	4 Nm	1	38.20 kg/100	
120 S	110-120 mm	167 mm	4 Nm	1	40.30 kg/100	
150 S	145-150 mm	203 mm	6 Nm	1	107.70 kg/100	
175 S	170-175 mm	228 mm	6 Nm	1	128 kg/100	
12/2 S	8-12 mm	58 mm	2 Nm	2	4.20 kg/100	
16/2 S	12-16 mm	67 mm	2 Nm	2	4.90 kg/100	
20/2 S	16-20 mm	75 mm	2 Nm	2	5.70 kg/100	
24/2 S	20-24 mm	84 mm	2 Nm	2	6.20 kg/100	
28/2 S	24-28 mm	92 mm	2 Nm	2	6.70 kg/100	

Артикул	Product	diameter	Hmax	torque	number of cables	weight
32/2 S	28-32 mm	101 mm	2 Nm	2	10.30 kg/100	
36/2 S	32-36 mm	109 mm	2 Nm	2	11.30 kg/100	
40/2 S	36-40 mm	117 mm	2 Nm	2	12 kg/100	
44/2 S	40-44 mm	127 mm	4 Nm	2	15.20 kg/100	
48/2 S	44-48 mm	135 mm	4 Nm	2	16.60 kg/100	
52/2 S	48-52 mm	144 mm	4 Nm	2	16.90 kg/100	
56/2 S	52-56 mm	152 mm	4 Nm	2	18.20 kg/100	
12/3 S	8-12 mm	71 mm	2 Nm	3	5.20 kg/100	
16/3 S	12-16 mm	85 mm	2 Nm	3	5.90 kg/100	
20/3 S	16-20 mm	97 mm	2 Nm	3	6.60 kg/100	
24/3 S	20-24 mm	110 mm	2 Nm	3	7.50 kg/100	
28/3 S	24-28 mm	122 mm	2 Nm	3	8.40 kg/100	

Aluminium

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 S-AL	8-12 mm	41 mm	1.50 Nm	1	2.20 kg/100	
16 S-AL	12-16 mm	46 mm	1.50 Nm	1	2.60 kg/100	
20 S-AL	16-20 mm	50 mm	1.50 Nm	1	3.20 kg/100	
24 S-AL	20-24 mm	54 mm	1.50 Nm	1	3.60 kg/100	
28 S-AL	24-28 mm	58 mm	1.50 Nm	1	3.90 kg/100	
32 S-AL	28-32 mm	63 mm	1.50 Nm	1	5.50 kg/100	
36 S-AL	32-36 mm	67 mm	1.50 Nm	1	6.30 kg/100	
40 S-AL	36-40 mm	71 mm	1.50 Nm	1	6.90 kg/100	
44 S-AL	40-44 mm	81 mm	3 Nm	1	7.50 kg/100	
48 S-AL	44-48 mm	85 mm	3 Nm	1	8.10 kg/100	
52 S-AL	48-52 mm	90 mm	3 Nm	1	10.40 kg/100	
56 S-AL	52-56 mm	94 mm	3 Nm	1	11.20 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 S-E	8-12 mm	41 mm	2 Nm	1	3.50 kg/100	
16 S-E	12-16 mm	46 mm	2 Nm	1	3.80 kg/100	
20 S-E	16-20 mm	50 mm	2 Nm	1	4.20 kg/100	
24 S-E	20-24 mm	54 mm	2 Nm	1	4.60 kg/100	
28 S-E	24-28 mm	58 mm	2 Nm	1	5 kg/100	
32 S-E	28-32 mm	63 mm	2 Nm	1	6.60 kg/100	
36 S-E	32-36 mm	67 mm	2 Nm	1	7.50 kg/100	
40 S-E	36-40 mm	71 mm	2 Nm	1	8.40 kg/100	
44 S-E	40-44 mm	81 mm	4 Nm	1	9.60 kg/100	
48 S-E	44-48 mm	85 mm	4 Nm	1	10.50 kg/100	
52 S-E	48-52 mm	90 mm	4 Nm	1	11.50 kg/100	
56 S-E	52-56 mm	94 mm	4 Nm	1	12.20 kg/100	

Product: Product

diameter: diameter

Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

