


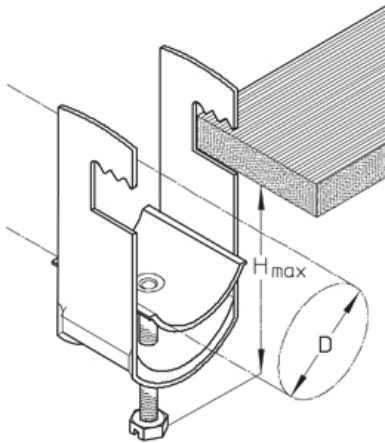

U

cable clamp for fastening to flat sections

Cable clamp with full-surface vat made of galvanised steel. For fastening to flat profiles with a material thickness of up to 12 mm.

Zinc coated

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 U	8-12 mm	41 mm	2 Nm	1	3.10 kg/100	
16 U	12-16 mm	46 mm	2 Nm	1	3.40 kg/100	
20 U	16-20 mm	50 mm	2 Nm	1	3.80 kg/100	
24 U	20-24 mm	54 mm	2 Nm	1	4.30 kg/100	
28 U	24-28 mm	58 mm	2 Nm	1	4.50 kg/100	
32 U	28-32 mm	63 mm	2 Nm	1	7.10 kg/100	
36 U	32-36 mm	67 mm	2 Nm	1	7.50 kg/100	
40 U	36-40 mm	71 mm	2 Nm	1	8.10 kg/100	
44 U	40-44 mm	81 mm	4 Nm	1	10.50 kg/100	
48 U	44-48 mm	85 mm	4 Nm	1	10.80 kg/100	
52 U	48-52 mm	90 mm	4 Nm	1	11.50 kg/100	
56 U	52-56 mm	94 mm	4 Nm	1	12.20 kg/100	
60 U	56-60 mm	98 mm	4 Nm	1	16.80 kg/100	
64 U	60-64 mm	102 mm	4 Nm	1	17.40 kg/100	
70 U	64-70 mm	109 mm	4 Nm	1	18.50 kg/100	
76 U	70-76 mm	113 mm	4 Nm	1	24.80 kg/100	
82 U	76-82 mm	119 mm	4 Nm	1	27.20 kg/100	
88 U	82-88 mm	125 mm	4 Nm	1	28.30 kg/100	
94 U	88-94 mm	131 mm	4 Nm	1	31 kg/100	
100 U	94-100 mm	137 mm	4 Nm	1	33.60 kg/100	
110 U	100-110 mm	157 mm	4 Nm	1	35.60 kg/100	
120 U	110-120 mm	167 mm	4 Nm	1	38.40 kg/100	
150 U	145-150 mm	203 mm	6 Nm	1	108.20 kg/100	
175 U	170-175 mm	228 mm	6 Nm	1	133.10 kg/100	
12/2 U	8-12 mm	58 mm	2 Nm	2	3.90 kg/100	
16/2 U	12-16 mm	67 mm	2 Nm	2	4.40 kg/100	
20/2 U	16-20 mm	75 mm	2 Nm	2	5 kg/100	
24/2 U	20-24 mm	84 mm	2 Nm	2	5.70 kg/100	
28/2 U	24-28 mm	92 mm	2 Nm	2	6.10 kg/100	

Артикул	Product	diameter	Hmax	torque	number of cables	weight
32/2 U	28-32 mm	101 mm	2 Nm	2	9.70 kg/100	
36/2 U	32-36 mm	109 mm	2 Nm	2	10.60 kg/100	
40/2 U	36-40 mm	117 mm	2 Nm	2	11.50 kg/100	
44/2 U	40-44 mm	127 mm	4 Nm	2	13.40 kg/100	
48/2 U	44-48 mm	135 mm	4 Nm	2	14.90 kg/100	
52/2 U	48-52 mm	144 mm	4 Nm	2	15.80 kg/100	
56/2 U	52-56 mm	152 mm	4 Nm	2	17 kg/100	
12/3 U	8-12 mm	71 mm	2 Nm	3	4.50 kg/100	
16/3 U	12-16 mm	85 mm	2 Nm	3	5.40 kg/100	
20/3 U	16-20 mm	97 mm	2 Nm	3	6.20 kg/100	
24/3 U	20-24 mm	110 mm	2 Nm	3	7.10 kg/100	
28/3 U	24-28 mm	122 mm	2 Nm	3	7.90 kg/100	

Aluminium

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 U-AL	8-12 mm	41 mm	1.50 Nm	1	1.70 kg/100	
16 U-AL	12-16 mm	46 mm	1.50 Nm	1	2.00 kg/100	
20 U-AL	16-20 mm	50 mm	1.50 Nm	1	2.30 kg/100	
24 U-AL	20-24 mm	54 mm	1.50 Nm	1	2.50 kg/100	
28 U-AL	24-28 mm	58 mm	1.50 Nm	1	2.80 kg/100	
32 U-AL	28-32 mm	63 mm	1.50 Nm	1	4.10 kg/100	
36 U-AL	32-36 mm	67 mm	1.50 Nm	1	4.50 kg/100	
40 U-AL	36-40 mm	71 mm	1.50 Nm	1	4.90 kg/100	
44 U-AL	40-44 mm	81 mm	3 Nm	1	5.20 kg/100	
48 U-AL	44-48 mm	85 mm	3 Nm	1	5.50 kg/100	
52 U-AL	48-52 mm	90 mm	3 Nm	1	6.10 kg/100	
56 U-AL	52-56 mm	94 mm	3 Nm	1	6.50 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	Hmax	torque	number of cables	weight
12 U-E	8-12 mm	41 mm	2 Nm	1	2.90 kg/100	
16 U-E	12-16 mm	46 mm	2 Nm	1	3.30 kg/100	
20 U-E	16-20 mm	50 mm	2 Nm	1	3.70 kg/100	
24 U-E	20-24 mm	54 mm	2 Nm	1	4 kg/100	
28 U-E	24-28 mm	58 mm	2 Nm	1	4.40 kg/100	
32 U-E	28-32 mm	63 mm	2 Nm	1	5.40 kg/100	
36 U-E	32-36 mm	67 mm	2 Nm	1	6.70 kg/100	
40 U-E	36-40 mm	71 mm	2 Nm	1	7.60 kg/100	
44 U-E	40-44 mm	81 mm	4 Nm	1	9.30 kg/100	
48 U-E	44-48 mm	85 mm	4 Nm	1	9.90 kg/100	
52 U-E	48-52 mm	90 mm	4 Nm	1	11 kg/100	
56 U-E	52-56 mm	94 mm	4 Nm	1	11.30 kg/100	

Product: Product

diameter: diameter

Hmax: Maximum height

torque: torque

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

