


T

bracket


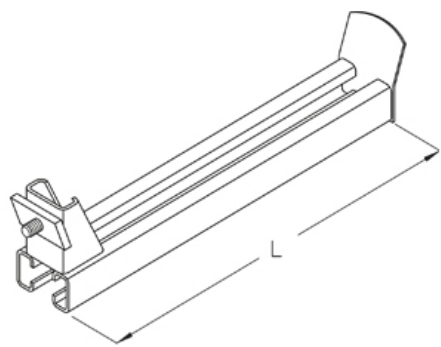


Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	length	loading	weight	incl.
T 20/AM18	200 mm	3 kN	0.50 kg	show all inclusive accessoires	
T 25/AM18	250 mm	2.40 kN	0.58 kg	show all inclusive accessoires	
T 30/AM18	300 mm	2.00 kN	0.66 kg	show all inclusive accessoires	
T 35/AM18	350 mm	1.70 kN	0.74 kg	show all inclusive accessoires	
T 40/AM18	400 mm	1.50 kN	0.84 kg	show all inclusive accessoires	
T 45/AM18	450 mm	1.40 kN	0.93 kg	show all inclusive accessoires	
T 50/AM18	500 mm	1.20 kN	1.00 kg	show all inclusive accessoires	
T 60/AM18	600 mm	1.00 kN	1.18 kg	show all inclusive accessoires	

Product: Product
length: length
loading: loading
weight: weight
incl.: incl.

DETAILS / APPLICATIONS

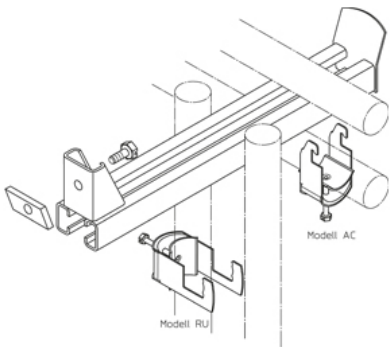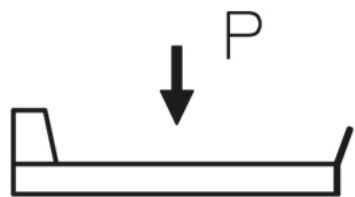



ACCESSORIES

AC, RU,

