


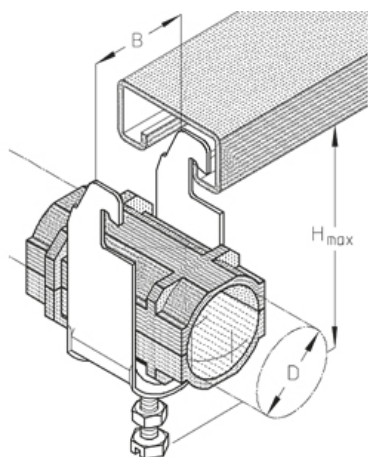

AC-HW

cable clamp for fastening to C-profile rails

HF cable clamp with all-over vat made of galvanised steel and plastic half-vats made of polystyrene. For fastening to C-profile rails (C+, C60°) with a slot size of 18/22 mm.

Zinc coated

Артикул	Product	width	diameter	Hmax	number of cables	weight
20 AC-HW	20 mm	1/2 inch	53 mm	1	4.42 kg/100	
32 AC-HW	32 mm	7/8 inch	68 mm	1	8.60 kg/100	
44 AC-HW	44 mm	1 1/4 inch	83 mm	1	10.20 kg/100	
56 AC-HW	56 mm	1 5/8 inch	106 mm	1	16.82 kg/100	
20/2 AC-HW	20 mm	1/2 inch	73 mm	2	6.44 kg/100	
32/2 AC-HW	32 mm	7/8 inch	102 mm	2	13.30 kg/100	
44/2 AC-HW	44 mm	1 1/4 inch	129 mm	2	20.50 kg/100	
56/2 AC-HW	56 mm	1 5/8 inch	164 mm	2	26.54 kg/100	
20/3 AC-HW	20 mm	1/2 inch	93 mm	3	8.66 kg/100	
32/3 AC-HW	32 mm	7/8 inch	136 mm	3	18 kg/100	
44/3 AC-HW	44 mm	1 1/4 inch	176 mm	3	28.60 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	diameter	Hmax	number of cables	weight
20 AC-HW-E	20 mm	1/2 inch	53 mm	1	4.12 kg/100	
32 AC-HW-E	32 mm	7/8 inch	68 mm	1	7 kg/100	
44 AC-HW-E	44 mm	1 1/4 inch	83 mm	1	12.30 kg/100	
56 AC-HW-E	56 mm	1 5/8 inch	106 mm	1	16.10 kg/100	
20/2 AC-HW-E	20 mm	1/2 inch	73 mm	2	6.14 kg/100	
32/2 AC-HW-E	32 mm	7/8 inch	102 mm	2	11.70 kg/100	
44/2 AC-HW-E	44 mm	1 1/4 inch	129 mm	2	19.10 kg/100	
32/3 AC-HW-E	32 mm	7/8 inch	136 mm	3	15.90 kg/100	
44/3 AC-HW-E	44 mm	1 1/4 inch	176 mm	3	26 kg/100	

Product: Product

width: width

diameter: diameter

Hmax: Maximum height

number of cables: Maximum number of installable cables

Страница 1

weight: weight

DETAILS / APPLICATIONS

