


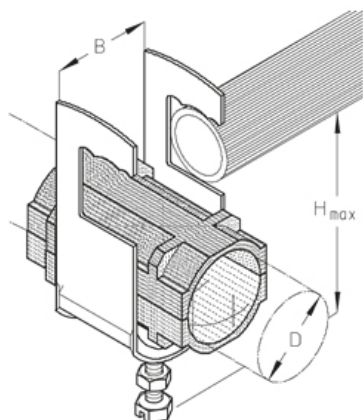

RU-HW

cable clamp for fastening to round and flat profiles

HF cable clamp with all-over vat made of galvanised steel and plastic half-vats made of polystyrene. For fastening to round and flat profiles with a material thickness of up to 22 mm.

Zinc coated

Артикул	Product	width	diameter	Hmax	number of cables	weight
20 RU-HW	20 mm	1/2 inch	53 mm	1	5.82 kg/100	
32 RU-HW	32 mm	7/8 inch	68 mm	1	11.40 kg/100	
44 RU-HW	44 mm	1 1/4 inch	83 mm	1	15.70 kg/100	
56 RU-HW	56 mm	1 5/8 inch	106 mm	1	21.72 kg/100	
20/2 RU-HW	20 mm	1/2 inch	73 mm	2	8.64 kg/100	
32/2 RU-HW	32 mm	7/8 inch	102 mm	2	16.90 kg/100	
44/2 RU-HW	44 mm	1 1/4 inch	129 mm	2	23.24 kg/100	
56/2 RU-HW	56 mm	1 5/8 inch	164 mm	2	29.24 kg/100	
20/3 RU-HW	20 mm	1/2 inch	93 mm	3	12.80 kg/100	
32/3 RU-HW	32 mm	7/8 inch	136 mm	3	25 kg/100	
44/3 RU-HW	44 mm	1 1/4 inch	176 mm	3	34.40 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	diameter	Hmax	number of cables	weight
20 RU-HW-E	20 mm	1/2 inch	53 mm	1	5.72 kg/100	
32 RU-HW-E	32 mm	7/8 inch	68 mm	1	11.10 kg/100	
44 RU-HW-E	44 mm	1 1/4 inch	83 mm	1	14.60 kg/100	
56 RU-HW-E	56 mm	1 5/8 inch	106 mm	1	18.50 kg/100	
20/2 RU-HW-E	20 mm	1/2 inch	73 mm	2	7.94 kg/100	
32/2 RU-HW-E	32 mm	7/8 inch	102 mm	2	16.70 kg/100	
44/2 RU-HW-E	44 mm	1 1/4 inch	129 mm	2	22.60 kg/100	
56/2 RU-HW-E	56 mm	1 5/8 inch	164 mm	2	29.30 kg/100	
20/3 RU-HW-E	20 mm	1/2 inch	93 mm	3	10.40 kg/100	
32/3 RU-HW-E	32 mm	7/8 inch	136 mm	3	22.10 kg/100	
44/3 RU-HW-E	44 mm	1 1/4 inch	176 mm	3	30.60 kg/100	

Product: Product

width: width

diameter: diameter

Hmax: Maximum height

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

