


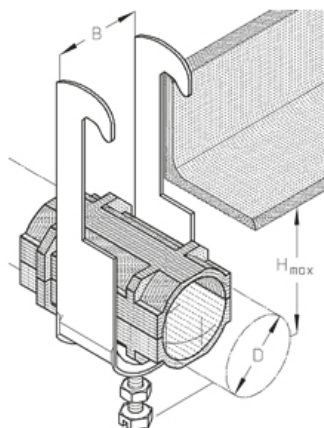

S-HW

cable clamp for fastening to angle profiles

HF cable clamp with all-over vat made of galvanised steel and plastic half-vats made of polystyrene. For fastening to angle profiles with a side length of up to max. 43 mm.

Zinc coated

Артикул	Product	width	diameter	diameter	Hmax	number of cables	weight
20 S-HW	20 mm	20 mm	1/2 inch	53 mm	1	5.52 kg/100	
32 S-HW	32 mm	32 mm	7/8 inch	68 mm	1	8.60 kg/100	
44 S-HW	44 mm	44 mm	1 1/4 inch	83 mm	1	14.90 kg/100	
56 S-HW	56 mm	56 mm	1 5/8 inch	106 mm	1	18.22 kg/100	
20/2 S-HW	20 mm	20 mm	1/2 inch	73 mm	2	6.44 kg/100	
32/2 S-HW	32 mm	32 mm	7/8 inch	102 mm	2	13.30 kg/100	
20/3 S-HW	20 mm	20 mm	1/2 inch	93 mm	3	8.66 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	diameter	diameter	Hmax	number of cables	weight
20 S-HW-E	20 mm	20 mm	1/2 inch	53 mm	1	5.12 kg/100	
32 S-HW-E	32 mm	32 mm	7/8 inch	68 mm	1	8.80 kg/100	
44 S-HW-E	44 mm	44 mm	1 1/4 inch	83 mm	1	13.30 kg/100	
56 S-HW-E	56 mm	56 mm	1 5/8 inch	106 mm	1	17.50 kg/100	
20/2 S-HW-E	20 mm	20 mm	1/2 inch	73 mm	2	7.44 kg/100	
32/2 S-HW-E	32 mm	32 mm	7/8 inch	102 mm	2	13.50 kg/100	
44/2 S-HW-E	44 mm	44 mm	1 1/4 inch	129 mm	2	20.10 kg/100	
56/2 S-HW-E	56 mm	56 mm	1 5/8 inch	164 mm	2	26.80 kg/100	
20/3 S-HW-E	20 mm	20 mm	1/2 inch	93 mm	3	9.30 kg/100	
32/3 S-HW-E	32 mm	32 mm	7/8 inch	136 mm	3	17.70 kg/100	
44/3 S-HW-E	44 mm	44 mm	1 1/4 inch	176 mm	3	26.90 kg/100	

Product: Product

width: width

diameter: diameter

diameter: diameter

Hmax: Maximum height

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

