


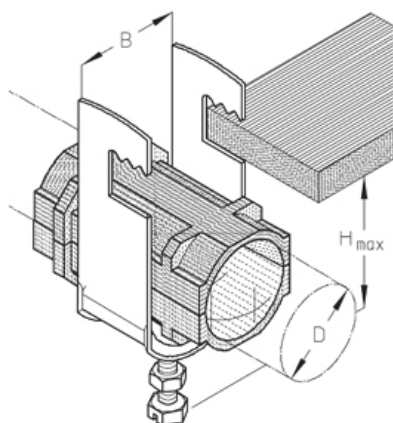

U-HW

cable clamp for fastening to flat sections

HF cable clamp with all-over vat made of galvanised steel and plastic half-vats made of polystyrene. For fastening to flat profiles with a material thickness of up to 12 mm.

Zinc coated

Артикул	Product	width	diameter	Hmax	number of cables	weight
20 U-HW	20 mm	1/2 inch	53 mm	1	4.72 kg/100	
32 U-HW	32 mm	7/8 inch	68 mm	1	9.30 kg/100	
44 U-HW	44 mm	1 1/4 inch	83 mm	1	14.20 kg/100	
56 U-HW	56 mm	1 5/8 inch	106 mm	1	17.52 kg/100	
20/2 U-HW	20 mm	1/2 inch	73 mm	2	6.84 kg/100	
32/2 U-HW	32 mm	7/8 inch	102 mm	2	14.10 kg/100	
44/2 U-HW	44 mm	1 1/4 inch	129 mm	2	21.80 kg/100	
56/2 U-HW	56 mm	1 5/8 inch	164 mm	2	27.64 kg/100	
20/3 U-HW	20 mm	1/2 inch	93 mm	3	8.96 kg/100	
32/3 U-HW	32 mm	7/8 inch	136 mm	3	21.80 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	diameter	Hmax	number of cables	weight
20 U-HW-E	20 mm	1/2 inch	53 mm	1	4.62 kg/100	
32 U-HW-E	32 mm	7/8 inch	68 mm	1	8.50 kg/100	
44 U-HW-E	44 mm	1 1/4 inch	83 mm	1	13 kg/100	
56 U-HW-E	56 mm	1 5/8 inch	106 mm	1	16.60 kg/100	
20/2 U-HW-E	20 mm	1/2 inch	73 mm	2	6.64 kg/100	
32/2 U-HW-E	32 mm	7/8 inch	102 mm	2	12.50 kg/100	
44/2 U-HW-E	44 mm	1 1/4 inch	129 mm	2	19.90 kg/100	
56/2 U-HW-E	56 mm	1 5/8 inch	164 mm	2	26.60 kg/100	
20/3 U-HW-E	20 mm	1/2 inch	93 mm	3	8.60 kg/100	
32/3 U-HW-E	32 mm	7/8 inch	136 mm	3	16.80 kg/100	
44/3 U-HW-E	44 mm	1 1/4 inch	176 mm	3	26.80 kg/100	

Product: Product

width: width

diameter: diameter

Hmax: Maximum height

number of cables: Maximum number of installable cables

weight: weight

DETAILS / APPLICATIONS

