


LW

extended counter vat

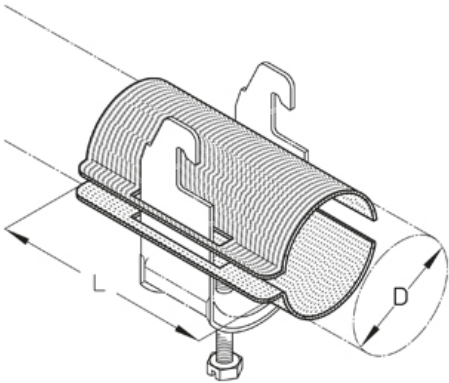

Long trough for improved cable support. certified according to DIN 4102-12

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	length	diameter	weight
LW 12	70 mm	9-12 mm	0.92 kg/100	
LW 16	70 mm	13-16 mm	0.97 kg/100	
LW 20	70 mm	17-20 mm	1.24 kg/100	
LW 24	70 mm	21-24 mm	1.52 kg/100	
LW 28	70 mm	25-28 mm	1.79 kg/100	
LW 32	70 mm	29-32 mm	2.18 kg/100	
LW 36	70 mm	33-36 mm	2.34 kg/100	
LW 40	70 mm	37-40 mm	2.62 kg/100	
LW 44	70 mm	41-44 mm	3.08 kg/100	
LW 48	70 mm	45-48 mm	3.39 kg/100	
LW 52	70 mm	49-52 mm	3.64 kg/100	
LW 56	70 mm	53-56 mm	3.98 kg/100	
LW 60	70 mm	57-60 mm	4.26 kg/100	
LW 64	70 mm	61-64 mm	4.53 kg/100	
LW 70	70 mm	65-70 mm	5.95 kg/100	
LW 76	70 mm	71-76 mm	11.50 kg/100	
LW 82	100 mm	77-82 mm	12.30 kg/100	
LW 88	100 mm	83-88 mm	13.00 kg/100	
LW 94	100 mm	89-94 mm	13.80 kg/100	
LW 100	100 mm	95-100 mm	15.00 kg/100	
LW 110	100 mm	101-110 mm	16.50 kg/100	
LW 120	100 mm	111-120 mm	17.80 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	length	diameter	weight
LW 12E	70 mm	9-12 mm	0.92 kg/100	
LW 16E	70 mm	13-16 mm	0.98 kg/100	
LW 20E	70 mm	17-20 mm	1.25 kg/100	

Артикул	Product	length	diameter	weight
LW 24E	70 mm	21-24 mm	1.53 kg/100	
LW 28E	70 mm	25-28 mm	1.81 kg/100	
LW 32E	70 mm	29-32 mm	2.19 kg/100	
LW 36E	70 mm	33-36 mm	2.36 kg/100	
LW 40E	70 mm	37-40 mm	2.63 kg/100	
LW 44E	70 mm	41-44 mm	3.10 kg/100	
LW 48E	70 mm	45-48 mm	3.41 kg/100	
LW 52E	70 mm	49-52 mm	3.66 kg/100	
LW 56E	70 mm	53-56 mm	4.02 kg/100	

Product: Product

length: length

diameter: diameter

weight: weight

DETAILS / APPLICATIONS

