


LD-SW

storm protection angle

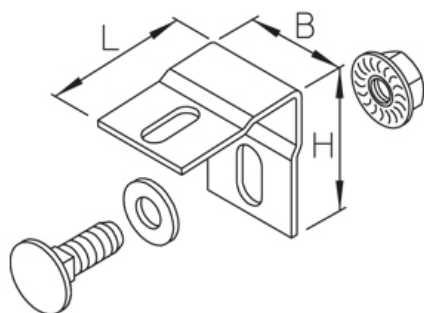

protection angle for additional securing of cable ladder covers especially in outdoor use

Storm protection angles, suitable for outdoor use. According to assembly instructions you should use at least 6 safety elements for each 3 meters cable path cover.

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	weight	incl.
LD-SW F	43 mm	30 mm	45 mm	2.00 mm	0.06 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	weight	incl.
LD-SW E	43 mm	30 mm	45 mm	2.00 mm	0.06 kg	show all inclusive accessoires	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	height	width	length	t	weight	incl.
LD-SW E4	43 mm	30 mm	45 mm	2.00 mm	0.06 kg	show all inclusive accessoires	

Product: Product

height: height

width: width

length: length

t: material thickness

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

