


## LKD

cable ladder crossing cover

cover for cable ladder crossing

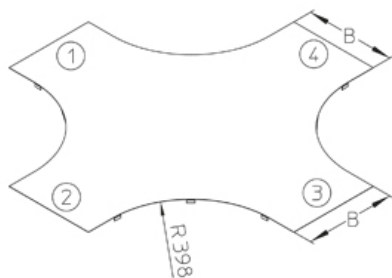

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул | Product | width  | radius  | t        | weight |
|---------|---------|--------|---------|----------|--------|
| LKD 20S | 204 mm  | 398 mm | 0.75 mm | 3.74 kg  |        |
| LKD 30S | 304 mm  | 398 mm | 1.00 mm | 6.97 kg  |        |
| LKD 40S | 404 mm  | 398 mm | 1.00 mm | 9.16 kg  |        |
| LKD 50S | 504 mm  | 398 mm | 1.25 mm | 14.35 kg |        |
| LKD 60S | 604 mm  | 398 mm | 1.25 mm | 18.07 kg |        |

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Артикул | Product | width  | radius  | t        | weight |
|---------|---------|--------|---------|----------|--------|
| LKD 20F | 204 mm  | 398 mm | 0.75 mm | 4.00 kg  |        |
| LKD 30F | 304 mm  | 398 mm | 1.00 mm | 7.46 kg  |        |
| LKD 40F | 404 mm  | 398 mm | 1.00 mm | 9.80 kg  |        |
| LKD 50F | 504 mm  | 398 mm | 1.25 mm | 15.35 kg |        |
| LKD 60F | 604 mm  | 398 mm | 1.25 mm | 19.33 kg |        |

### Stainless steel, according to ASTM 304 / BS 304 S 3

| Артикул | Product | width  | radius  | t        | weight |
|---------|---------|--------|---------|----------|--------|
| LKD 20E | 204 mm  | 398 mm | 0.80 mm | 4.00 kg  |        |
| LKD 30E | 304 mm  | 398 mm | 1.00 mm | 7.01 kg  |        |
| LKD 40E | 404 mm  | 398 mm | 1.00 mm | 9.22 kg  |        |
| LKD 50E | 504 mm  | 398 mm | 1.25 mm | 14.45 kg |        |
| LKD 60E | 604 mm  | 398 mm | 1.25 mm | 18.22 kg |        |

**Product:** Product

**width:** width

**radius:** radius

**t:** material thickness

**weight:** weight

