


LKDR

cable ladder crossing cover with turning bolts

cover for cable ladder crossing

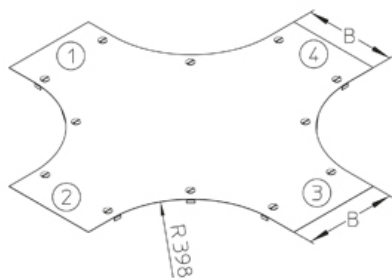

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	width	radius	t	weight
LKDR 20S	204 mm	398 mm	0.75 mm	4.20 kg	
LKDR 30S	304 mm	398 mm	1.00 mm	7.58 kg	
LKDR 40S	404 mm	398 mm	1.00 mm	9.81 kg	
LKDR 50S	504 mm	398 mm	1.25 mm	15.13 kg	
LKDR 60S	604 mm	398 mm	1.25 mm	18.30 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	radius	t	weight
LKDR 20F	204 mm	398 mm	0.75 mm	4.47 kg	
LKDR 30F	304 mm	398 mm	1.00 mm	8.09 kg	
LKDR 40F	404 mm	398 mm	1.00 mm	10.48 kg	
LKDR 50F	504 mm	398 mm	1.25 mm	15.23 kg	
LKDR 60F	604 mm	398 mm	1.25 mm	19.56 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	width	radius	t	weight
LKDR 20E	204 mm	398 mm	0.80 mm	4.52 kg	
LKDR 30E	304 mm	398 mm	1.00 mm	7.63 kg	
LKDR 40E	404 mm	398 mm	1.00 mm	9.87 kg	
LKDR 50E	504 mm	398 mm	1.25 mm	15.22 kg	
LKDR 60E	604 mm	398 mm	1.25 mm	18.41 kg	

Product: Product**width:** width**radius:** radius**t:** material thickness**weight:** weight

