


LGG 60

cable ladder, L-profile, height = 60 mm

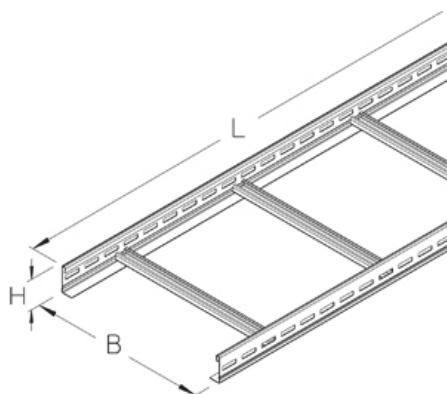

Cable ladder with continuously perforated side beams. Welded rungs made of profile rail 30x15 mm. Electrical conductivity tested according to DIN EN 61537.

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. The value Pmax applies when the ladder is used as vertical ladder.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	A	QLK	Pmax	weight
LGG 60-20-3S	60 mm	200 mm	3000 mm	81 cm ²	0.23 kN/m	1.50 kN	7.92 kg	
LGG 60-30-3S	60 mm	300 mm	3000 mm	122 cm ²	0.34 kN/m	1.50 kN	8.61 kg	
LGG 60-40-3S	60 mm	400 mm	3000 mm	162 cm ²	0.45 kN/m	1.50 kN	9.30 kg	
LGG 60-50-3S	60 mm	500 mm	3000 mm	203 cm ²	0.57 kN/m	1.50 kN	9.98 kg	
LGG 60-60-3S	60 mm	600 mm	3000 mm	243 cm ²	0.68 kN/m	1.50 kN	10.67 kg	
LGG 60-20S	60 mm	200 mm	6000 mm	81 cm ²	0.23 kN/m	1.50 kN	15.84 kg	
LGG 60-30S	60 mm	300 mm	6000 mm	122 cm ²	0.34 kN/m	1.50 kN	17.22 kg	
LGG 60-40S	60 mm	400 mm	6000 mm	162 cm ²	0.45 kN/m	1.50 kN	18.59 kg	
LGG 60-50S	60 mm	500 mm	6000 mm	203 cm ²	0.57 kN/m	1.50 kN	19.96 kg	
LGG 60-60S	60 mm	600 mm	6000 mm	243 cm ²	0.68 kN/m	1.50 kN	21.34 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	A	QLK	Pmax	weight
LGG 60-20-3F	60 mm	200 mm	3000 mm	81 cm ²	0.23 kN/m	1.50 kN	8.48 kg	
LGG 60-30-3F	60 mm	300 mm	3000 mm	122 cm ²	0.34 kN/m	1.50 kN	9.21 kg	
LGG 60-40-3F	60 mm	400 mm	3000 mm	162 cm ²	0.45 kN/m	1.50 kN	9.95 kg	
LGG 60-50-3F	60 mm	500 mm	3000 mm	203 cm ²	0.57 kN/m	1.50 kN	10.68 kg	
LGG 60-60-3F	60 mm	600 mm	3000 mm	243 cm ²	0.68 kN/m	1.50 kN	11.42 kg	
LGG 60-20F	60 mm	200 mm	6000 mm	81 cm ²	0.23 kN/m	1.50 kN	16.95 kg	
LGG 60-30F	60 mm	300 mm	6000 mm	122 cm ²	0.34 kN/m	1.50 kN	18.42 kg	
LGG 60-40F	60 mm	400 mm	6000 mm	162 cm ²	0.45 kN/m	1.50 kN	19.89 kg	
LGG 60-50F	60 mm	500 mm	6000 mm	203 cm ²	0.57 kN/m	1.50 kN	21.36 kg	
LGG 60-60F	60 mm	600 mm	6000 mm	243 cm ²	0.68 kN/m	1.50 kN	22.83 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	A	QLK	Pmax	weight
LGG 60-20-3E	60 mm	200 mm	3000 mm	81 cm ²	0.23 kN/m	1.50 kN	7.97 kg	
LGG 60-30-3E	60 mm	300 mm	3000 mm	122 cm ²	0.34 kN/m	1.50 kN	8.66 kg	
LGG 60-40-3E	60 mm	400 mm	3000 mm	162 cm ²	0.45 kN/m	1.50 kN	9.35 kg	
LGG 60-50-3E	60 mm	500 mm	3000 mm	203 cm ²	0.57 kN/m	1.50 kN	10.05 kg	
LGG 60-60-3E	60 mm	600 mm	3000 mm	243 cm ²	0.68 kN/m	1.50 kN	10.74 kg	
LGG 60-20E	60 mm	200 mm	6000 mm	81 cm ²	0.23 kN/m	1.50 kN	15.95 kg	
LGG 60-30E	60 mm	300 mm	6000 mm	122 cm ²	0.34 kN/m	1.50 kN	17.33 kg	
LGG 60-40E	60 mm	400 mm	6000 mm	162 cm ²	0.45 kN/m	1.50 kN	18.71 kg	
LGG 60-50E	60 mm	500 mm	6000 mm	203 cm ²	0.57 kN/m	1.50 kN	20.09 kg	
LGG 60-60E	60 mm	600 mm	6000 mm	243 cm ²	0.68 kN/m	1.50 kN	21.47 kg	

Product: Product

height: height

width: width

length: length


A: cross section area

QLK: distributed load power cable




Pmax: Maximum load


weight: weight

LOAD DIAGRAM

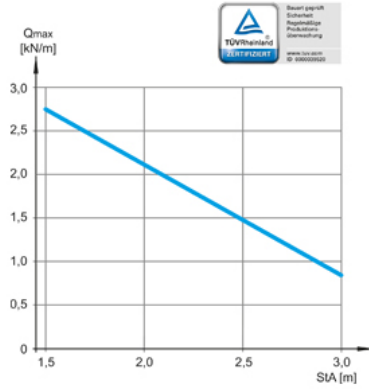

DETAILS / APPLICATIONS

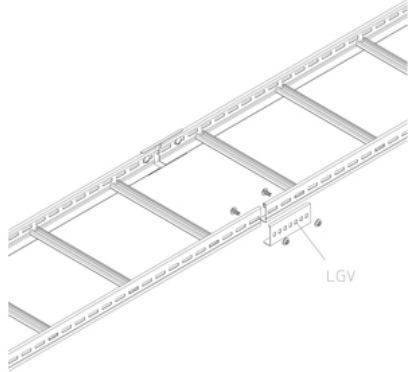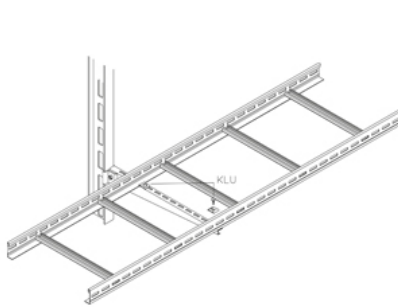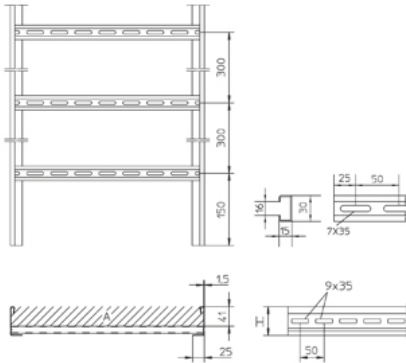

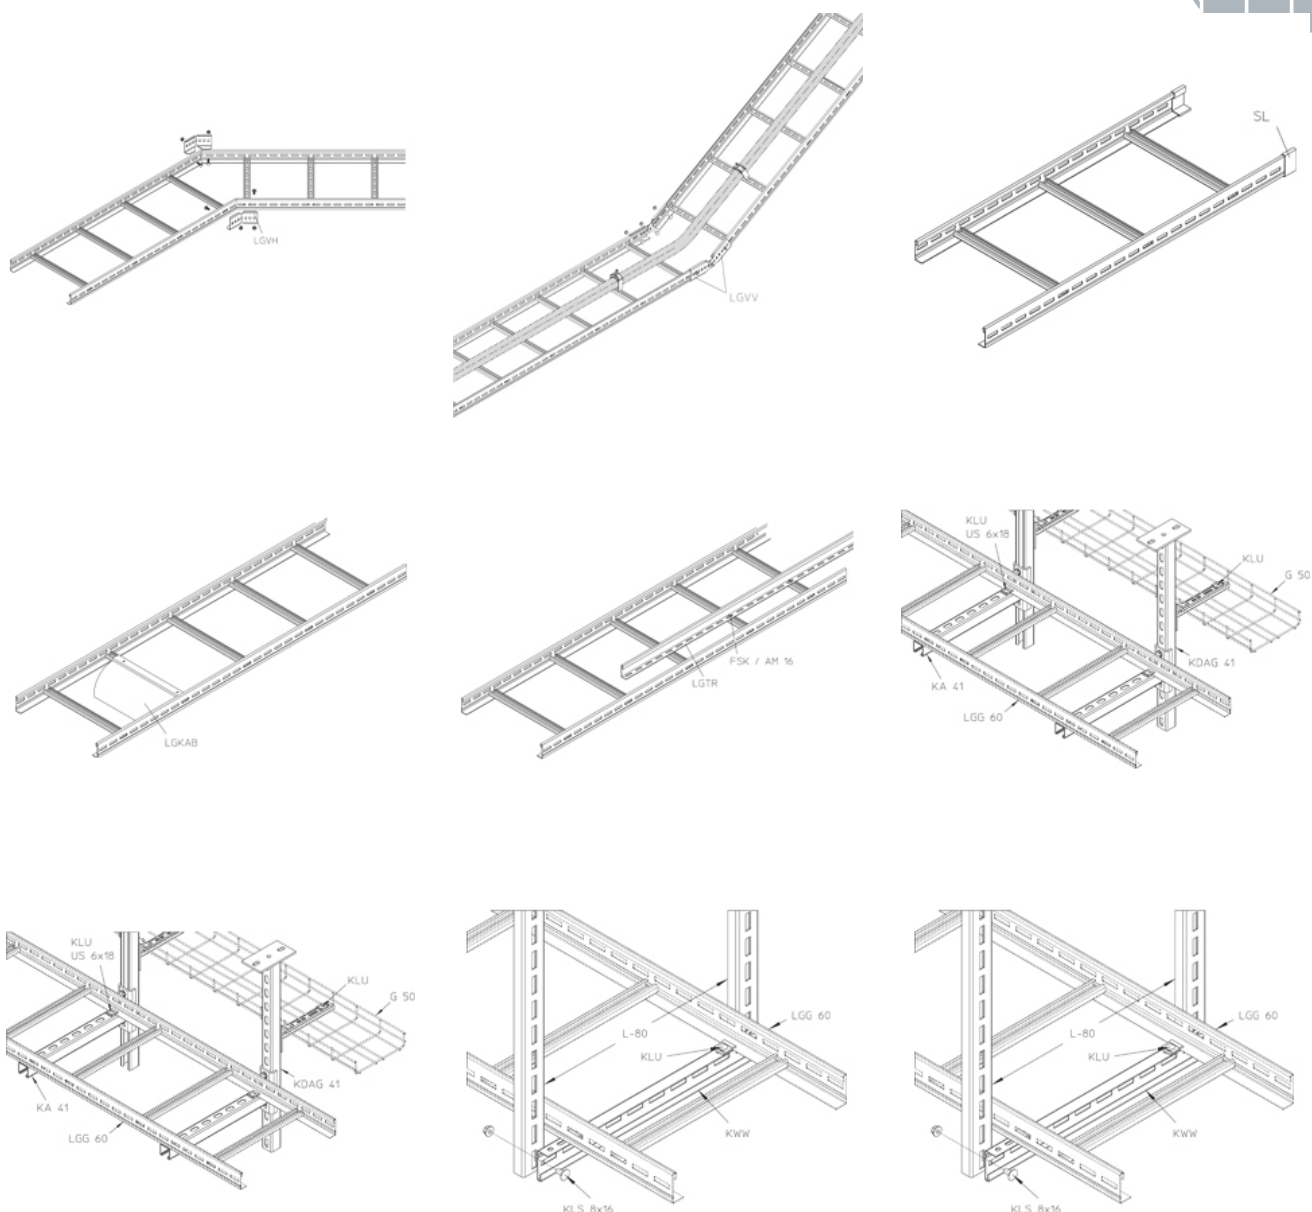

ACCESSORIES

LGIB 60, LGAB 60, LGVB 60, LGA 60, LGAA 60, LGK 60, LD, LDR, LGVH 60, LGVV 60, LGKAB, LGTR 60, SL 60, STD-A, H, LGV 60, KLU,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)



UL classified

