




КТW-R 4-12/2-10

cable support trough, Ø 40-120 mm

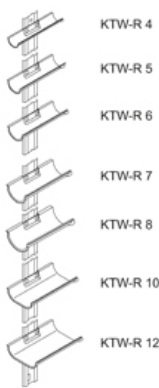

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Артикул       | Product | width  | diameter |
|---------------|---------|--------|----------|
| КТW-R 4/2-10  | 56 mm   | 40 mm  |          |
| КТW-R 5/2-10  | 66 mm   | 50 mm  |          |
| КТW-R 6/2-10  | 76 mm   | 60 mm  |          |
| КТW-R 7/2-10  | 86 mm   | 70 mm  |          |
| КТW-R 8/2-10  | 97 mm   | 80 mm  |          |
| КТW-R 12/2-10 | 138 mm  | 120 mm |          |

**Product:** Product  
**width:** width  
**diameter:** diameter

DETAILS / APPLICATIONS

