


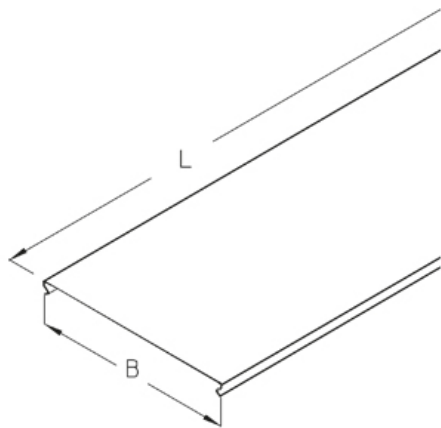

RDS

cable tray, heavy

cable tray cover, heavy, positive locking

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	width	length	t	weight
RDS 05S	50 mm	3000 mm	1.50 mm	3.03 kg	
RDS 10S	100 mm	3000 mm	1.50 mm	4.80 kg	
RDS 20S	200 mm	3000 mm	1.50 mm	8.33 kg	
RDS 30S	300 mm	3000 mm	1.50 mm	11.87 kg	
RDS 40S	400 mm	3000 mm	1.50 mm	15.40 kg	
RDS 50S	500 mm	3000 mm	1.50 mm	18.93 kg	
RDS 60S	600 mm	3000 mm	1.50 mm	22.46 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	length	t	weight
RDS 05F	50 mm	3000 mm	1.50 mm	3.10 kg	
RDS 10F	100 mm	3000 mm	1.50 mm	5.14 kg	
RDS 20F	200 mm	3000 mm	1.50 mm	8.92 kg	
RDS 30F	300 mm	3000 mm	1.50 mm	12.70 kg	
RDS 40F	400 mm	3000 mm	1.50 mm	16.47 kg	
RDS 50F	500 mm	3000 mm	1.50 mm	20.25 kg	
RDS 60F	600 mm	3000 mm	1.50 mm	24.03 kg	

Product: Product

width: width

length: length

t: material thickness

weight: weight

DETAILS / APPLICATIONS

