


## RBV 35

cable tray bend, variable, height = 35 mm

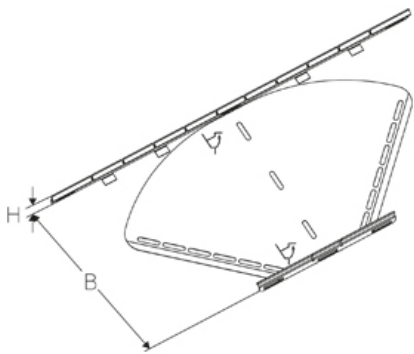

Variable cable tray bend 0 - 90° for horizontal change of direction with integrated connectors. With elongated holes for fastening separating strips or brackets. To obtain more stability at larger angles, the outer side can be connected to the bottom from a width of 200 mm. For cable protection, the edges at the head of the variable cable tray bend are folded over.

The variable cable tray bend is in a flat condition on delivery. For assembly, the inner and outer sides must be bent up. Attention must be paid to the correct alignment of the head shape.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул    | Product | height | width  | length  | weight                         | incl. |
|------------|---------|--------|--------|---------|--------------------------------|-------|
| RBV 35-05S | 35 mm   | 50 mm  | 240 mm | 0.15 kg | show all inclusive accessoires |       |
| RBV 35-10S | 35 mm   | 100 mm | 310 mm | 0.24 kg | show all inclusive accessoires |       |
| RBV 35-20S | 35 mm   | 200 mm | 490 mm | 0.48 kg | show all inclusive accessoires |       |
| RBV 35-30S | 35 mm   | 300 mm | 630 mm | 1.08 kg | show all inclusive accessoires |       |

**Product:** Product  
**height:** height  
**width:** width  
**length:** length  
**weight:** weight  
**incl.:** incl.

## ACCESSORIES

RBVD, RBVDR,

