




## RVB 85

cable tray vertical bend, height = 85 mm

cable tray vertical bend for flexible vertical change of direction

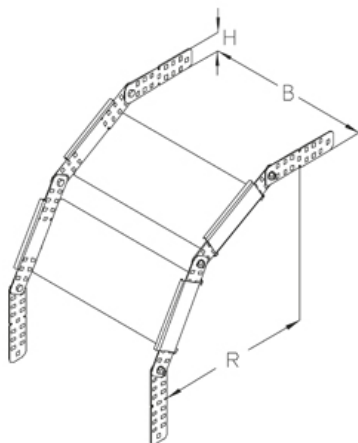

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул    | Product | height | width  | radius  | weight                         | incl. |
|------------|---------|--------|--------|---------|--------------------------------|-------|
| RVB 85-10S | 85 mm   | 100 mm | 330 mm | 3.09 kg | show all inclusive accessoires |       |
| RVB 85-20S | 85 mm   | 200 mm | 330 mm | 3.36 kg | show all inclusive accessoires |       |
| RVB 85-30S | 85 mm   | 300 mm | 330 mm | 3.86 kg | show all inclusive accessoires |       |
| RVB 85-40S | 85 mm   | 400 mm | 330 mm | 4.14 kg | show all inclusive accessoires |       |
| RVB 85-50S | 85 mm   | 500 mm | 330 mm | 4.49 kg | show all inclusive accessoires |       |
| RVB 85-60S | 85 mm   | 600 mm | 330 mm | 4.84 kg | show all inclusive accessoires |       |

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Артикул    | Product | height | width  | radius  | weight                         | incl. |
|------------|---------|--------|--------|---------|--------------------------------|-------|
| RVB 85-10F | 85 mm   | 100 mm | 330 mm | 3.30 kg | show all inclusive accessoires |       |
| RVB 85-20F | 85 mm   | 200 mm | 330 mm | 3.69 kg | show all inclusive accessoires |       |
| RVB 85-30F | 85 mm   | 300 mm | 330 mm | 4.04 kg | show all inclusive accessoires |       |
| RVB 85-40F | 85 mm   | 400 mm | 330 mm | 4.42 kg | show all inclusive accessoires |       |
| RVB 85-50F | 85 mm   | 500 mm | 330 mm | 4.79 kg | show all inclusive accessoires |       |
| RVB 85-60F | 85 mm   | 600 mm | 330 mm | 5.17 kg | show all inclusive accessoires |       |

**Product:** Product

**height:** height

**width:** width

**radius:** radius

**weight:** weight

**incl.:** incl.

## DETAILS / APPLICATIONS



## ACCESSORIES

REB,



UL classified

