




R 35

cable tray, unperforated, height = 35 mm

cable tray not perforated, head shape suitable for positive locking covers, certified including electrical conductivity according to DIN EN 61537

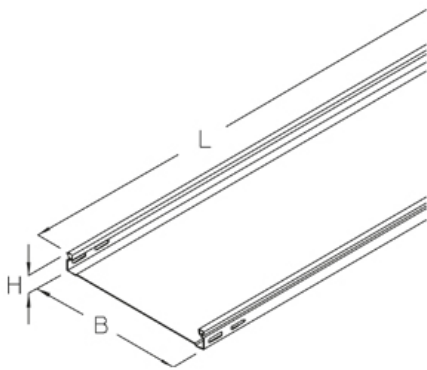

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	A	QSK	weight
R 35-05S	35 mm	50 mm	3000 mm	0.75 mm	15 cm ²	0.02 kN/m	2.90 kg	
R 35-10S	35 mm	100 mm	3000 mm	0.75 mm	32 cm ²	0.05 kN/m	3.70 kg	
R 35-20S	35 mm	200 mm	3000 mm	0.75 mm	67 cm ²	0.10 kN/m	5.50 kg	
R 35-30S	35 mm	300 mm	3000 mm	0.75 mm	102 cm ²	0.15 kN/m	7.30 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	A	QSK	weight
R 35-05F	35 mm	50 mm	3000 mm	0.75 mm	15 cm ²	0.02 kN/m	3.20 kg	
R 35-10F	35 mm	100 mm	3000 mm	0.75 mm	32 cm ²	0.05 kN/m	4.20 kg	
R 35-20F	35 mm	200 mm	3000 mm	0.75 mm	67 cm ²	0.10 kN/m	6.20 kg	
R 35-30F	35 mm	300 mm	3000 mm	0.75 mm	102 cm ²	0.15 kN/m	8.10 kg	

Product: Product

height: height

width: width

length: length


t: material thickness

A: cross section area


QSK: distributed load control cable

weight: weight

LOAD DIAGRAM

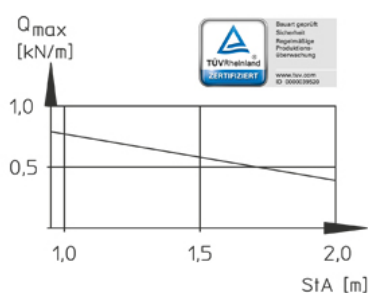

DETAILS / APPLICATIONS



ACCESSORIES

RB 35, RB45 35, RBV 35, RAE 35, RAA 35, RA 35, RK 35, RVB 35, RR 35, RD, RDR, RAB 35, RGV 35, REB, RTR 35, VB, KLR,



Do not walk upon!



UL classified

