




## R 85

cable tray, unperforated, height = 85 mm

cable tray not perforated, head shape suitable for positive locking covers, certified including electrical conductivity according to DIN EN 61537

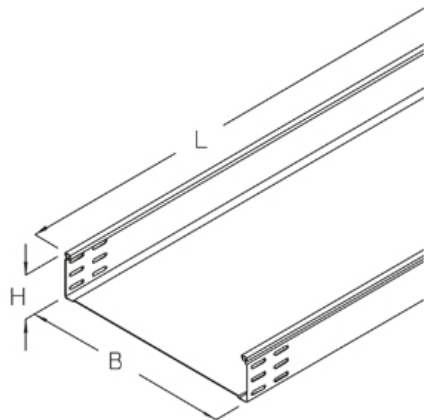

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

| Артикул  | Product | height | width   | length  | t                   | A         | QSK      | weight |
|----------|---------|--------|---------|---------|---------------------|-----------|----------|--------|
| R 85-10S | 85 mm   | 100 mm | 3000 mm | 0.75 mm | 82 cm <sup>2</sup>  | 0.12 kN/m | 5.50 kg  |        |
| R 85-20S | 85 mm   | 200 mm | 3000 mm | 0.75 mm | 167 cm <sup>2</sup> | 0.25 kN/m | 7.20 kg  |        |
| R 85-30S | 85 mm   | 300 mm | 3000 mm | 0.88 mm | 252 cm <sup>2</sup> | 0.38 kN/m | 10.60 kg |        |
| R 85-40S | 85 mm   | 400 mm | 3000 mm | 0.88 mm | 337 cm <sup>2</sup> | 0.51 kN/m | 12.60 kg |        |
| R 85-50S | 85 mm   | 500 mm | 3000 mm | 1.00 mm | 422 cm <sup>2</sup> | 0.63 kN/m | 16.70 kg |        |
| R 85-60S | 85 mm   | 600 mm | 3000 mm | 1.00 mm | 507 cm <sup>2</sup> | 0.76 kN/m | 19.00 kg |        |

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

| Артикул  | Product | height | width   | length  | t                   | A         | QSK      | weight |
|----------|---------|--------|---------|---------|---------------------|-----------|----------|--------|
| R 85-10F | 85 mm   | 100 mm | 3000 mm | 0.75 mm | 82 cm <sup>2</sup>  | 0.12 kN/m | 6.10 kg  |        |
| R 85-20F | 85 mm   | 200 mm | 3000 mm | 0.75 mm | 167 cm <sup>2</sup> | 0.25 kN/m | 8.10 kg  |        |
| R 85-30F | 85 mm   | 300 mm | 3000 mm | 0.88 mm | 252 cm <sup>2</sup> | 0.38 kN/m | 11.60 kg |        |
| R 85-40F | 85 mm   | 400 mm | 3000 mm | 0.88 mm | 337 cm <sup>2</sup> | 0.51 kN/m | 13.90 kg |        |
| R 85-50F | 85 mm   | 500 mm | 3000 mm | 1.00 mm | 422 cm <sup>2</sup> | 0.63 kN/m | 18.20 kg |        |
| R 85-60F | 85 mm   | 600 mm | 3000 mm | 1.00 mm | 507 cm <sup>2</sup> | 0.76 kN/m | 20.80 kg |        |

**Product:** Product

**height:** height

**width:** width

**length:** length


**t:** material thickness

**A:** cross section area


**QSK:** distributed load control cable

**weight:** weight

## LOAD DIAGRAM

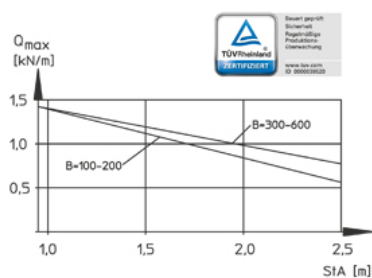

## DETAILS / APPLICATIONS

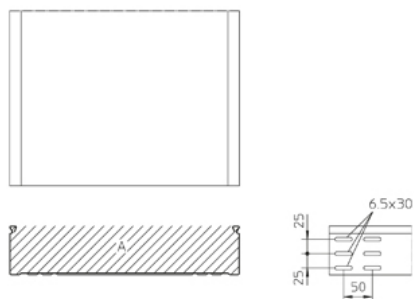

## ACCESSORIES

RB 85, RB45 85, RBV 85, RAE 85, RAA 85, RA 85, RK 85, RVB 85, RR 85, RD, RDR, RAB 85, RGV 85, REB, RTR 85, VB, KLR,



Do not walk upon!



UL classified

