




## RG 35

cable tray, perforated, height = 35 mm

cable tray perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537

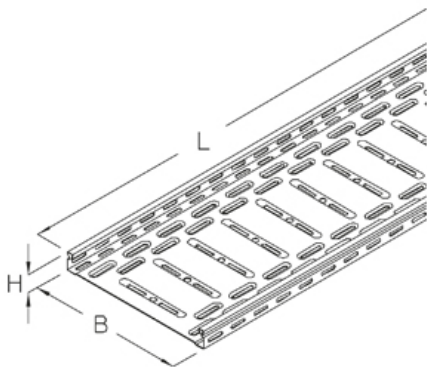

### Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


| Артикул   | Product | height | width   | length  | t                   | A         | QSK     | weight |
|-----------|---------|--------|---------|---------|---------------------|-----------|---------|--------|
| RG 35-05S | 35 mm   | 50 mm  | 3000 mm | 0.75 mm | 15 cm <sup>2</sup>  | 0.02 kN/m | 2.60 kg |        |
| RG 35-10S | 35 mm   | 100 mm | 3000 mm | 0.75 mm | 32 cm <sup>2</sup>  | 0.05 kN/m | 3.50 kg |        |
| RG 35-20S | 35 mm   | 200 mm | 3000 mm | 0.75 mm | 67 cm <sup>2</sup>  | 0.10 kN/m | 5.20 kg |        |
| RG 35-30S | 35 mm   | 300 mm | 3000 mm | 0.75 mm | 102 cm <sup>2</sup> | 0.15 kN/m | 6.00 kg |        |

### Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


| Артикул   | Product | height | width   | length  | t                   | A         | QSK     | weight |
|-----------|---------|--------|---------|---------|---------------------|-----------|---------|--------|
| RG 35-05F | 35 mm   | 50 mm  | 3000 mm | 0.75 mm | 15 cm <sup>2</sup>  | 0.02 kN/m | 2.90 kg |        |
| RG 35-10F | 35 mm   | 100 mm | 3000 mm | 0.75 mm | 32 cm <sup>2</sup>  | 0.05 kN/m | 3.80 kg |        |
| RG 35-20F | 35 mm   | 200 mm | 3000 mm | 0.75 mm | 67 cm <sup>2</sup>  | 0.10 kN/m | 5.60 kg |        |
| RG 35-30F | 35 mm   | 300 mm | 3000 mm | 0.75 mm | 102 cm <sup>2</sup> | 0.15 kN/m | 7.60 kg |        |

**Product:** Product  
**height:** height  
**width:** width  
**length:** length  
**t:** material thickness  
**A:** cross section area  
**QSK:** distributed load control cable  
**weight:** weight

## LOAD DIAGRAM

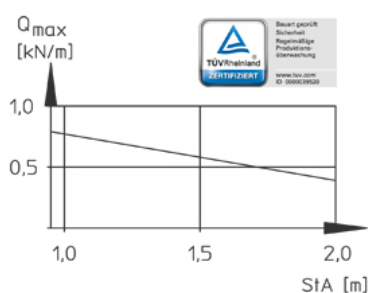

## DETAILS / APPLICATIONS

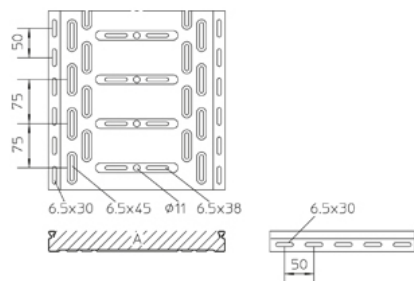

## ACCESSORIES

RB 35, RB45 35, RBV 35, RAE 35, RAA 35, RA 35, RK 35, RVB 35, RR 35, RD, RDR, RAB 35, RGV 35, REB, RTR 35, RKAB, VB, KLR,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)



UL classified

