




RG 85

cable tray, perforated, height = 85 mm

cable tray perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537

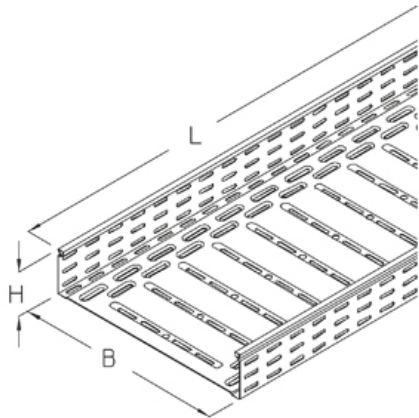

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Артикул	Product	height	width	length	t	A	QSK	weight
RG 85-10S	85 mm	100 mm	3000 mm	0.75 mm	82 cm ²	0.12 kN/m	5.00 kg	
RG 85-20S	85 mm	200 mm	3000 mm	0.75 mm	167 cm ²	0.25 kN/m	6.50 kg	
RG 85-30S	85 mm	300 mm	3000 mm	0.88 mm	252 cm ²	0.38 kN/m	9.60 kg	
RG 85-40S	85 mm	400 mm	3000 mm	0.88 mm	337 cm ²	0.51 kN/m	11.60 kg	
RG 85-50S	85 mm	500 mm	3000 mm	1.00 mm	422 cm ²	0.63 kN/m	15.20 kg	
RG 85-60S	85 mm	600 mm	3000 mm	1.00 mm	507 cm ²	0.76 kN/m	17.60 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	A	QSK	weight
RG 85-10F	85 mm	100 mm	3000 mm	0.75 mm	82 cm ²	0.12 kN/m	6.00 kg	
RG 85-20F	85 mm	200 mm	3000 mm	0.75 mm	167 cm ²	0.25 kN/m	7.20 kg	
RG 85-30F	85 mm	300 mm	3000 mm	0.88 mm	252 cm ²	0.38 kN/m	10.60 kg	
RG 85-40F	85 mm	400 mm	3000 mm	0.88 mm	337 cm ²	0.51 kN/m	12.90 kg	
RG 85-50F	85 mm	500 mm	3000 mm	1.00 mm	422 cm ²	0.63 kN/m	16.60 kg	
RG 85-60F	85 mm	600 mm	3000 mm	1.00 mm	507 cm ²	0.76 kN/m	18.40 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
A: cross section area
QSK: distributed load control cable
weight: weight

LOAD DIAGRAM

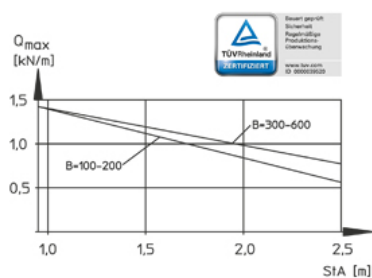

DETAILS / APPLICATIONS

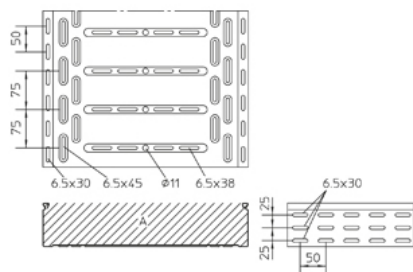

ACCESSORIES

RB 85, RB45 85, RBV 85, RAE 85, RAA 85, RA 85, RK 85, RVB 85, RR 85, RD, RDR, RAB 85, RGV 85, REB, RTR 85, RKAB, VB, KLR,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)



UL classified

