




RGS 110

cable tray, perforated, heavy, height = 110 mm

heavy cable tray perforated, head shape suitable for positive locking covers, with longitudinal and lateral reinforcing rims reducing bottom deflection, certified including electrical conductivity according to DIN EN 61537

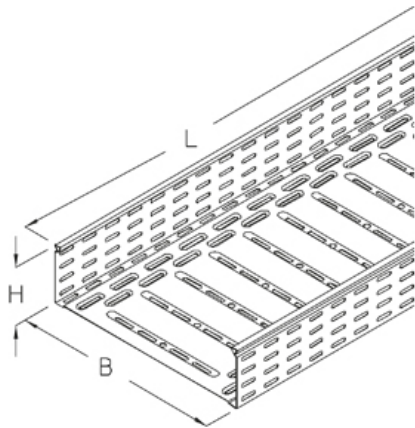

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)


Артикул	Product	height	width	length	t	A	QSK	weight
RGS 110-10S	110 mm	100 mm	3000 mm	1.50 mm	107 cm ²	0.16 kN/m	11.50 kg	
RGS 110-20S	110 mm	200 mm	3000 mm	1.50 mm	217 cm ²	0.33 kN/m	14.00 kg	
RGS 110-30S	110 mm	300 mm	3000 mm	1.50 mm	327 cm ²	0.49 kN/m	17.50 kg	
RGS 110-40S	110 mm	400 mm	3000 mm	1.50 mm	437 cm ²	0.66 kN/m	20.50 kg	
RGS 110-50S	110 mm	500 mm	3000 mm	1.50 mm	547 cm ²	0.82 kN/m	24.00 kg	
RGS 110-60S	110 mm	600 mm	3000 mm	1.50 mm	657 cm ²	0.99 kN/m	27.40 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	A	QSK	weight
RGS 110-10F	110 mm	100 mm	3000 mm	1.50 mm	107 cm ²	0.16 kN/m	12.10 kg	
RGS 110-20F	110 mm	200 mm	3000 mm	1.50 mm	217 cm ²	0.33 kN/m	14.30 kg	
RGS 110-30F	110 mm	300 mm	3000 mm	1.50 mm	327 cm ²	0.49 kN/m	18.80 kg	
RGS 110-40F	110 mm	400 mm	3000 mm	1.50 mm	437 cm ²	0.66 kN/m	22.40 kg	
RGS 110-50F	110 mm	500 mm	3000 mm	1.50 mm	547 cm ²	0.82 kN/m	25.00 kg	
RGS 110-60F	110 mm	600 mm	3000 mm	1.50 mm	657 cm ²	0.99 kN/m	29.40 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
A: cross section area
QSK: distributed load control cable
weight: weight

LOAD DIAGRAM

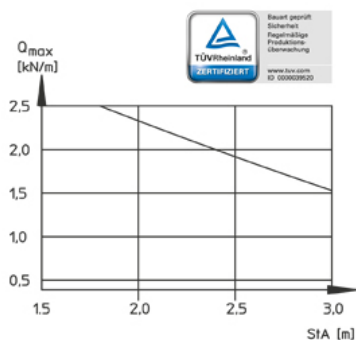

DETAILS / APPLICATIONS

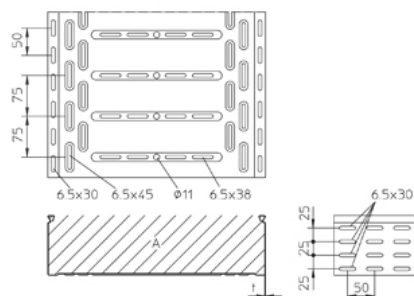

ACCESSORIES

RB 110, RB45 110, RBV 110, RAE 110, RAA 110, RA 110, RK 110, RVB 110, RR 110, RD, RDR, RAB 110, RGV 110, REB, RTR 110, RKAB, VB, KLR,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)



UL classified

