


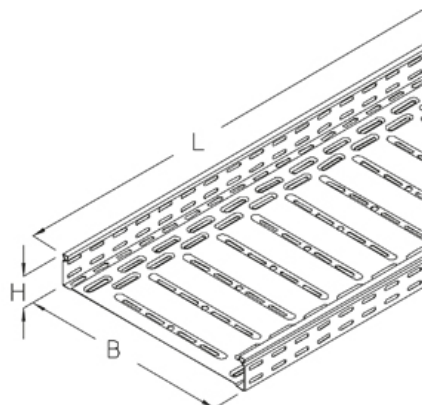

RGS 60

cable tray, perforated, heavy, height = 60 mm

cable tray, heavy-duty, perforated head shape suitable for positive locking covers with longitudinal and lateral reinforcing rims reducing bottom deflection Electrical conductivity tested according to DIN EN 61537. certified according to DIN 4102-12

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish. cable load as standard support construction max. 10 kg/m.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	A	QSK	weight
RGS 60-10S	60 mm	100 mm	3000 mm	1.50 mm	57 cm ²	0.09 kN/m	8.30 kg	
RGS 60-20S	60 mm	200 mm	3000 mm	1.50 mm	117 cm ²	0.18 kN/m	11.30 kg	
RGS 60-30S	60 mm	300 mm	3000 mm	1.50 mm	177 cm ²	0.27 kN/m	14.60 kg	
RGS 60-40S	60 mm	400 mm	3000 mm	1.50 mm	237 cm ²	0.36 kN/m	18.00 kg	
RGS 60-50S	60 mm	500 mm	3000 mm	1.50 mm	297 cm ²	0.45 kN/m	21.30 kg	
RGS 60-60S	60 mm	600 mm	3000 mm	1.50 mm	357 cm ²	0.54 kN/m	24.60 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)


Артикул	Product	height	width	length	t	A	QSK	weight
RGS 60-10F	60 mm	100 mm	3000 mm	1.50 mm	57 cm ²	0.09 kN/m	8.90 kg	
RGS 60-20F	60 mm	200 mm	3000 mm	1.50 mm	117 cm ²	0.18 kN/m	12.10 kg	
RGS 60-30F	60 mm	300 mm	3000 mm	1.50 mm	177 cm ²	0.27 kN/m	15.60 kg	
RGS 60-40F	60 mm	400 mm	3000 mm	1.50 mm	237 cm ²	0.36 kN/m	19.10 kg	
RGS 60-50F	60 mm	500 mm	3000 mm	1.50 mm	297 cm ²	0.45 kN/m	22.70 kg	
RGS 60-60F	60 mm	600 mm	3000 mm	1.50 mm	357 cm ²	0.54 kN/m	26.20 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3


Артикул	Product	height	width	length	t	A	QSK	weight
RGS 60-10E	60 mm	100 mm	3000 mm	1.50 mm	57 cm ²	0.09 kN/m	8.40 kg	
RGS 60-20E	60 mm	200 mm	3000 mm	1.50 mm	117 cm ²	0.18 kN/m	11.40 kg	
RGS 60-30E	60 mm	300 mm	3000 mm	1.50 mm	177 cm ²	0.27 kN/m	14.70 kg	
RGS 60-40E	60 mm	400 mm	3000 mm	1.50 mm	234 cm ²	0.36 kN/m	18.10 kg	
RGS 60-50E	60 mm	500 mm	3000 mm	1.50 mm	297 cm ²	0.45 kN/m	21.40 kg	
RGS 60-60E	60 mm	600 mm	3000 mm	1.50 mm	357 cm ²	0.54 kN/m	24.70 kg	

Product: Product
height: height
width: width
length: length
t: material thickness
A: cross section area
QSK: distributed load control cable
weight: weight

LOAD DIAGRAM

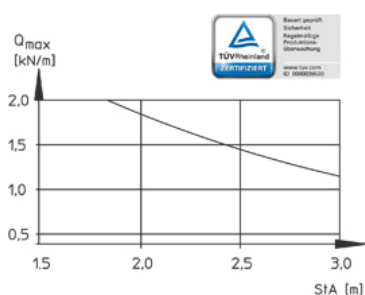

DETAILS / APPLICATIONS

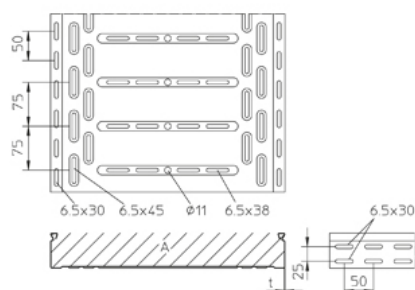

ACCESSORIES

RB 60, RB45 60, RBV 60, RAE 60, RAA 60, RA 60, RK 60, RVB 60, RR 60, RD, RDR, RDS, RDSR, RAB 60, RGV 60, REB, RTR 60, RKAB, VB, MA 60, KLR,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)



UL classified

