

RI 60

cable installation tray, perforated, height = 60 mm

cable installation tray with big side and bottom perforation for leading cables out, head shape suitable for positive locking covers, certified including electrical conductivity according to DIN EN 61537

This article is available made in material No. 1.4571/1.4404 (V4A) stainless steel finish.



Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	A	QSK	weight
RI 60-05S	60 mm	50 mm	3000 mm	1.00 mm	28 cm ²	0.04 kN/m	3.60 kg	
RI 60-10S	60 mm	100 mm	3000 mm	1.00 mm	58 cm ²	0.09 kN/m	4.64 kg	
RI 60-15S	60 mm	150 mm	3000 mm	1.00 mm	118 cm ²	0.18 kN/m	5.60 kg	
RI 60-20S	60 mm	200 mm	3000 mm	1.00 mm	178 cm ²	0.27 kN/m	6.20 kg	
RI 60-30S	60 mm	300 mm	3000 mm	1.00 mm	238 cm ²	0.36 kN/m	8.70 kg	

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	height	width	length	t	A	QSK	weight
RI 60-05F	60 mm	50 mm	3000 mm	1.00 mm	28 cm ²	0.04 kN/m	3.79 kg	
RI 60-10F	60 mm	100 mm	3000 mm	1.00 mm	58 cm ²	0.09 kN/m	4.85 kg	
RI 60-15F	60 mm	150 mm	3000 mm	1.00 mm	118 cm ²	0.18 kN/m	6.15 kg	
RI 60-20F	60 mm	200 mm	3000 mm	1.00 mm	178 cm ²	0.27 kN/m	6.78 kg	
RI 60-30F	60 mm	300 mm	3000 mm	1.00 mm	237 cm ²	0.36 kN/m	9.25 kg	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	height	width	length	t	A	QSK	weight
RI 60-05E	60 mm	50 mm	3000 mm	1.00 mm	28 cm ²	0.04 kN/m	3.49 kg	
RI 60-10E	60 mm	100 mm	3000 mm	1.00 mm	58 cm ²	0.09 kN/m	4.51 kg	
RI 60-15E	60 mm	150 mm	3000 mm	1.00 mm	118 cm ²	0.18 kN/m	5.78 kg	
RI 60-20E	60 mm	200 mm	3000 mm	1.00 mm	178 cm ²	0.27 kN/m	6.20 kg	
RI 60-30E	60 mm	300 mm	3000 mm	1.00 mm	238 cm ²	0.36 kN/m	8.70 kg	


Product: Product
height: height
width: width
length: length
t: material thickness

A: cross section area


QSK: distributed load control cable

weight: weight

LOAD DIAGRAM

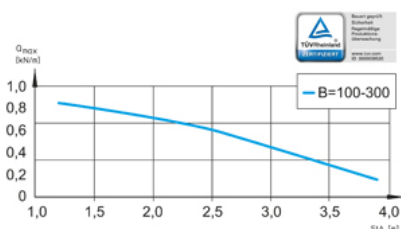

DETAILS / APPLICATIONS

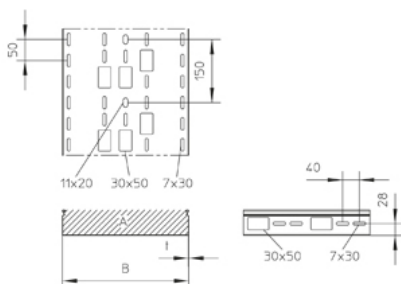

ACCESSORIES

RIB 60, RIA 60, RIK 60, RID, RIDR, RBD, RAD, RIV 60, REB, RITR 60, RKAB, KSR 50, SRI 60, AHB, VB, KSB, KLR,



Do not walk upon!



TÜV certified



certified according to Det Norske Veritas (DNV) and Germanischer Lloyd (GL)



UL classified

