


FKS

slotted cylinder head screw, DIN EN ISO 1580

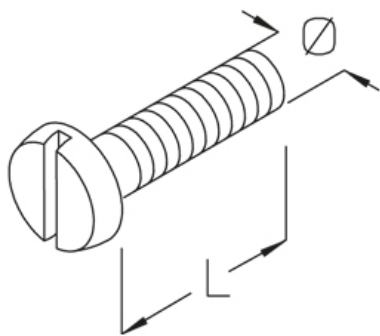

galvanized, according to ISO 4042

Артикул	Product	length	diameter	diameter	weight
FKS 6X10	10 mm	12 mm	6 mm	0.40 kg/100	
FKS 6X20	20 mm	12 mm	6 mm	0.60 kg/100	
FKS 6X25	25 mm	12 mm	6 mm	0.70 kg/100	
FKS 8X20	20 mm	16 mm	8 mm	1.30 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	length	diameter	diameter	weight
FKS 6X10E	10 mm	12 mm	6 mm	0.40 kg/100	
FKS 6X16E	16 mm	12 mm	6 mm	0.40 kg/100	
FKS 6X20E	20 mm	12 mm	6 mm	0.60 kg/100	
FKS 6X25E	25 mm	12 mm	6 mm	0.70 kg/100	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	length	diameter	diameter	weight
FKS 6X12E4	12 mm	12 mm	6 mm	0.40 kg/100	
FKS 6X16E4	16 mm	12 mm	6 mm	0.40 kg/100	
FKS 8X16E4	16 mm	16 mm	8 mm	1.10 kg/100	

Product: Product
length: length
diameter: diameter
diameter: diameter
weight: weight

DETAILS / APPLICATIONS

