


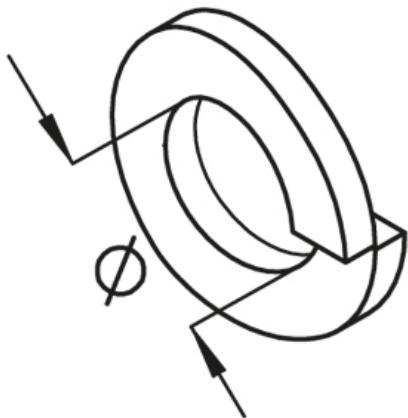

FR

spring ring

galvanized, according to ISO 4042

Артикул	Product	diameter	diameter	weight
FR B6	11.80 mm	6.10 mm	0.10 kg/100	
FR B8	14.80 mm	8.10 mm	0.15 kg/100	
FR B10	18.10 mm	10.20 mm	0.20 kg/100	
FR B12	21.10 mm	12.20 mm	0.25 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	diameter	diameter	weight
FR B6E	11.80 mm	6.10 mm	0.10 kg/100	
FR B8E	14.80 mm	8.10 mm	0.15 kg/100	
FR B10E	18.10 mm	10.20 mm	0.20 kg/100	
FR B12E	21.10 mm	12.20 mm	0.25 kg/100	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	diameter	diameter	weight
FR B6E4	11.80 mm	6.10 mm	0.10 kg/100	
FR B8E4	14.80 mm	8.10 mm	0.15 kg/100	
FR B10E4	18.10 mm	10.20 mm	0.20 kg/100	
FR B12E4	21.10 mm	12.20 mm	0.25 kg/100	

Product: Product
diameter: diameter
diameter: diameter
weight: weight

DETAILS / APPLICATIONS

