


MKD

beam clamp

Mounting clamp made of steel

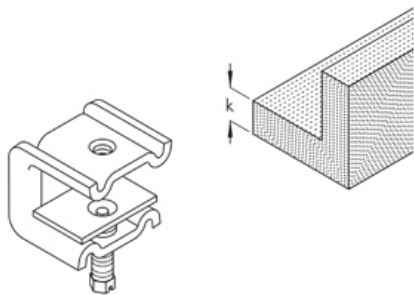

Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	width	diameter	k	loading	torque	weight
MKD 21	44 mm	M8 mm	6-21 mm	1.50 kN	4 Nm	19 kg/100	
MKD 21 M6	44 mm	M6 mm	6-21 mm	1.50 kN	4 Nm	18 kg/100	
MKD 21 M10	44 mm	M10 mm	6-21 mm	1.50 kN	4 Nm	17.30 kg/100	
MKD 40	44 mm	M8 mm	20-40 mm	1.30 kN	4 Nm	20.40 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3





Артикул	Product	width	diameter	k	loading	torque	weight
MKD 21E	44 mm	M8 mm	6-21 mm	1.50 kN	4 Nm	19 kg/100	
MKD 21E M6	44 mm	M6 mm	6-21 mm	1.50 kN	4 Nm	18 kg/100	
MKD 21E M10	44 mm	M10 mm	6-21 mm	1.50 kN	4 Nm	17.30 kg/100	
MKD 40E	44 mm	M8 mm	20-40 mm	1.30 kN	4 Nm	19.30 kg/100	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	width	diameter	k	loading	torque	weight
MKD 21E4	44 mm	M8 mm	6-21 mm	1.50 kN	4 Nm	19 kg/100	
MKD 40E4	44 mm	M8 mm	20-40 mm	1.30 kN	4 Nm	19.30 kg/100	

Product: Product
width: width
diameter: diameter
k: clamping range
loading: loading
torque: torque
weight: weight

DETAILS / APPLICATIONS

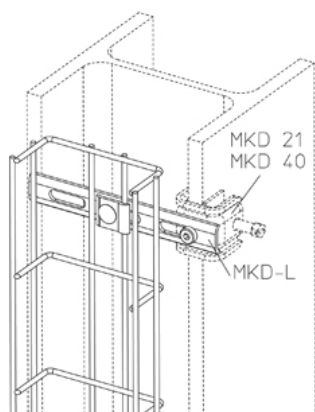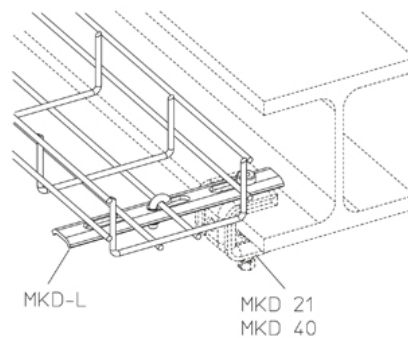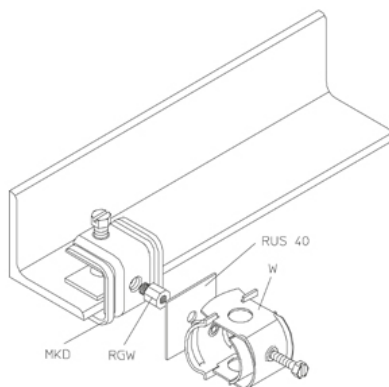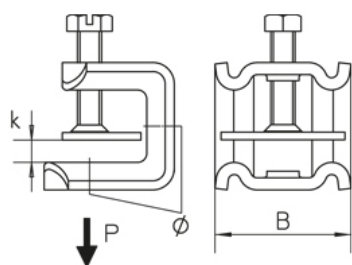

ACCESSORIES

MKD L,

