


SKL M

beam clamp set



Hot-dip galvanized, according to BS 729 (DIN EN ISO 1461)

Артикул	Product	k	Pmax	torque	weight	incl.
SKL MF	5 - 25 mm	10 kN	35 Nm	0.45 kg/set	show all inclusive accessoires	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	k	Pmax	torque	weight	incl.
SKL ME4	5 - 25 mm	10 kN	35 Nm	0.46 kg/set	show all inclusive accessoires	

Product: Product

k: clamping range


Pmax: Maximum load

torque: torque

weight: weight

incl.: incl.

DETAILS / APPLICATIONS

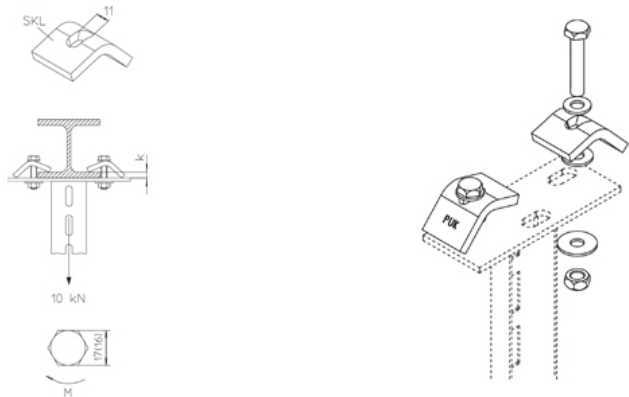



ACCESSORIES

KDU 60, KHA 2, HS22, KDU 60, KDU 60,

