


SA

anchor

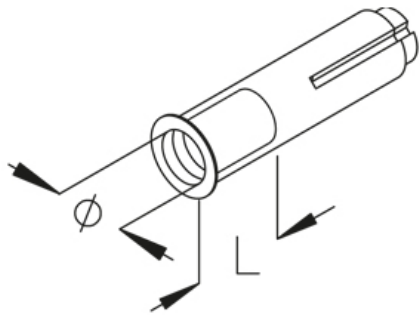

Permissible as multiple fastening. Permissible load in non-cracked normal concrete of strength $\geq C20/25$. Manufacturer's information has to be observed strictly (ETA-07/0135).

galvanized, according to ISO 4042

Артикул	Product	length	Lmin	diameter	diameter	Pzul	weight
SA 6	6-12 mm	27 mm	8 mm	6 mm	3.95 kN	0.40 kg/100	
SA 8	11-17 mm	33 mm	10 mm	8 mm	3.95 kN	0.50 kg/100	
SA 10	13-19 mm	44 mm	12 mm	10 mm	6.10 kN	0.80 kg/100	
SA 12	15-21 mm	54 mm	15 mm	12 mm	8.50 kN	1.60 kg/100	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	length	Lmin	diameter	diameter	Pzul	weight
SA 6E4	6-12 mm	27 mm	8 mm	6 mm	3.95 kN	0.40 kg/100	
SA 8E4	11-17 mm	33 mm	10 mm	8 mm	3.95 kN	0.50 kg/100	
SA 10E4	13-19 mm	44 mm	12 mm	10 mm	6.10 kN	0.80 kg/100	
SA 12E4	15-21 mm	54 mm	15 mm	12 mm	8.50 kN	1.60 kg/100	

Product: Product

length: length

Lmin: Minimum drilling depth

diameter: diameter

diameter: diameter

Pzul: permissible tractive force

weight: weight

DETAILS / APPLICATIONS

