


VAB-HB

shear connector rod, concrete

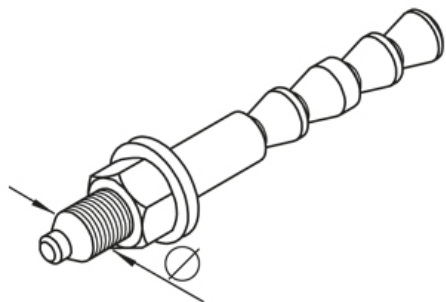

Permissible as single fastening. Permissible load in cracked and non-cracked normal concrete of strength $\geq C20/25$. Manufacturer's information has to be observed strictly (ETA-05/0164).

galvanized, according to ISO 4042

Артикул	Product	Lmin	diameter	diameter	t	Pzul	weight
VAB-HB 10/20	75 mm	10 mm	10 mm	0-20 mm	8 kN	0.07 kg	
VAB-HB 12/25	90 mm	12 mm	12 mm	0-25 mm	11.10 kN	0.12 kg	
VAB-HB 16/30	110 mm	16 mm	16 mm	0-30 mm	15.90 kN	0.30 kg	

Stainless steel, according to ASTM 31 Ti / AISI 316 L, BS 320S17 / BS 316S11

Артикул	Product	Lmin	diameter	diameter	t	Pzul	weight
VAB-HB 10/20E4	75 mm	10 mm	10 mm	0-20 mm	8 kN	0.07 kg	
VAB-HB 12/25E4	90 mm	12 mm	12 mm	0-25 mm	11.10 kN	0.12 kg	
VAB-HB 16/30E4	110 mm	16 mm	16 mm	0-30 mm	15.90 kN	0.30 kg	

Product: Product

Lmin: Minimum drilling depth

diameter: diameter



diameter: diameter

t: material thickness

Pzul: permissible tractive force

weight: weight

DETAILS / APPLICATIONS

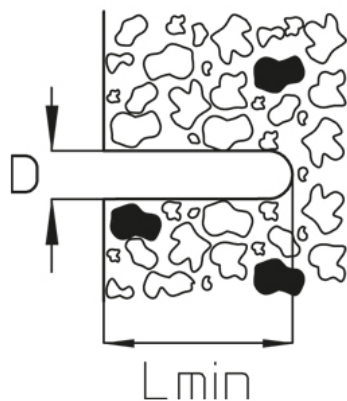

ACCESSORIES

VAB-HB M,

