


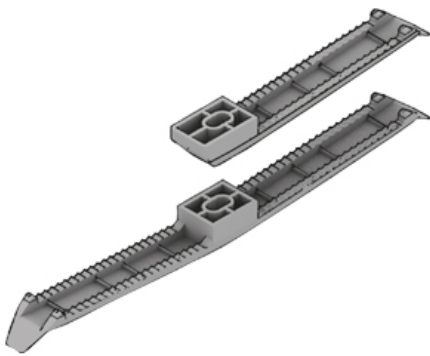

LK K

cable holder, plastic

flame-resistant according to specification of UL94 V-0 and fire hazard testing VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

Suitable for applications with low installation height. The information on the number of cables relating to the use of NYM cable (3 x 1.5 mm).

Polyamide

Артикул	Product	height	number of cables	colour	weight	PT
LK 8 K	16 mm	8	RAL 7035	0.01 kg	750 °C	
LK 10 K	16 mm	10	RAL 7035	0.01 kg	750 °C	
LK 16 K	16 mm	16	RAL 7035	0.02 kg	750 °C	
LK 8 FWK	16 mm	8	RAL 7030	0.01 kg	960 °C	
LK 10 FWK	16 mm	10	RAL 7030	0.01 kg	960 °C	
LK 16 FWK	16 mm	16	RAL 7030	0.02 kg	960 °C	

Product: Product

height: height

number of cables: Maximum number of installable cables

colour: colour

weight: weight

PT: test temperature

ACCESSORIES

SN, KSD,

