


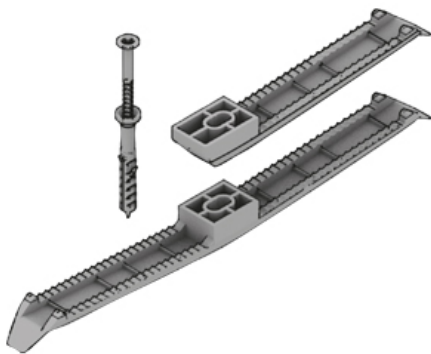

## LK ND K

cable holder, plastic, with nail plug

flame-resistant according to specification of UL94 V-0 and fire hazard testing VDE 0471/DIN IEC 695 part 2-1, testing temperature  $T_{max}$

Suitable for applications with low installation height. The information on the number of cables relating to the use of NYM cable (3 x 1.5 mm ).

### Polyamide

| Артикул      | Product | height | number of cables | colour  | weight | PT                             | incl. |
|--------------|---------|--------|------------------|---------|--------|--------------------------------|-------|
| LK 8 ND K    | 16 mm   | 8      | RAL 7035         | 0.02 kg | 750 °C | show all inclusive accessoires |       |
| LK 10 ND K   | 16 mm   | 10     | RAL 7035         | 0.02 kg | 750 °C | show all inclusive accessoires |       |
| LK 16 ND K   | 16 mm   | 16     | RAL 7035         | 0.03 kg | 750 °C | show all inclusive accessoires |       |
| LK 8 ND FWK  | 16 mm   | 8      | RAL 7030         | 0.02 kg | 960 °C | show all inclusive accessoires |       |
| LK 10 ND FWK | 16 mm   | 10     | RAL 7030         | 0.02 kg | 960 °C | show all inclusive accessoires |       |
| LK 16 ND FWK | 16 mm   | 16     | RAL 7030         | 0.03 kg | 960 °C | show all inclusive accessoires |       |

**Product:** Product

**height:** height

**number of cables:** Maximum number of installable cables

**colour:** colour

**weight:** weight

**PT:** test temperature

**incl.:** incl.

