




SH ND K

multiple cable holder, plastic, with nail plug

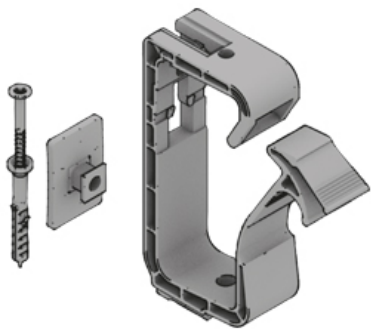

flame-resistant according to specification of UL94 V-0 and fire hazard testing VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

The information on the number of cables relating to the use of NYM cable (3 x 1.5 mm).

Polyamide

Артикул	Product	number of cables	colour	weight	PT	incl.
SH 15 ND K	15	RAL 7035	0.04 kg	750 °C	show all inclusive accessoires	
SH 30 ND K	30	RAL 7035	0.06 kg	750 °C	show all inclusive accessoires	
SH 15 ND FWK	15	RAL 7030	0.04 kg	960 °C	show all inclusive accessoires	
SH 30 ND FWK	30	RAL 7030	0.06 kg	960 °C	show all inclusive accessoires	

Product: Product
number of cables: Maximum number of installable cables
colour: colour
weight: weight
PT: test temperature
incl.: incl.

ACCESSORIES

KOT K,