


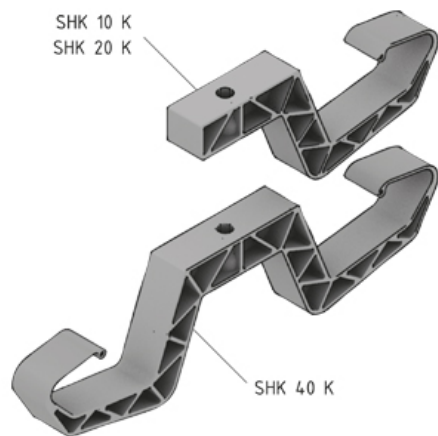

SHK K

cable holder, plastic

flame-resistant according to fire hazard testing VDE 0471/DIN IEC 695 part 2-1, testing temperature T_{max}

Suitable for applications with limited installation height. The information on the number of cables relating to the use of NYM cable (3 x 1.5 mm). The SHK 10 and 20 are single-sided cable holders. The SHK 40 is a two-sided cable holder.

Polyamide

Артикул	Product	height	number of cables	colour	weight	PT
SHK 10 K	45 mm	10	RAL 7035	0.02 kg	750 °C	
SHK 20 K	58 mm	20	RAL 7035	0.03 kg	750 °C	
SHK 40 K	58 mm	40	RAL 7035	0.05 kg	750 °C	

Product: Product

height: height

number of cables: Maximum number of installable cables

colour: colour

weight: weight

PT: test temperature

ACCESSORIES

SN, KSD,

