


DSAHF8 3

wire suspension with threaded end M8 and universal closure

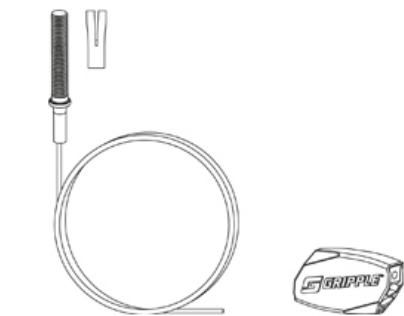

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripple load class	weight
DSAHF8 31GV	1000 mm	0.88 kN	3	0.10 kg	
DSAHF8 32GV	2000 mm	0.88 kN	3	0.14 kg	
DSAHF8 33GV	3000 mm	0.88 kN	3	0.18 kg	
DSAHF8 34GV	4000 mm	0.88 kN	3	0.22 kg	
DSAHF8 35GV	5000 mm	0.88 kN	3	0.26 kg	
DSAHF8 310GV	10000 mm	0.88 kN	3	0.42 kg	

Product: Product
length: length
Pmax: Maximum load
Gripple load class: Gripple load class
weight: weight

