


DSAHFFR 4

wire suspension with loop and universal closure

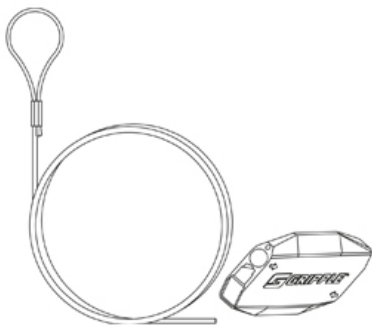

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripple load class	weight
DSAHFFR 41GV	1000 mm	2.21 kN	4	0.22 kg	
DSAHFFR 42GV	2000 mm	2.21 kN	4	0.29 kg	
DSAHFFR 43GV	3000 mm	2.21 kN	4	0.39 kg	
DSAHFFR 44GV	4000 mm	2.21 kN	4	0.45 kg	
DSAHFFR 45GV	5000 mm	2.21 kN	4	0.61 kg	
DSAHFFR 410GV	10000 mm	2.21 kN	4	1.09 kg	

Product: Product

length: length

Pmax: Maximum load

Gripple load class: Gripple load class

weight: weight

