


DSAHHFR 5

wire suspension with loop and universal closure

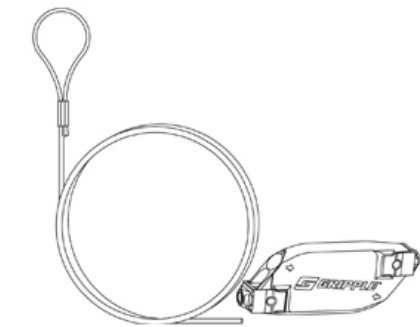

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripple load class	weight
DSAHHFR 51GV	1000 mm	3.19 kN	5	0.40 kg	
DSAHHFR 52GV	2000 mm	3.19 kN	5	0.70 kg	
DSAHHFR 53GV	3000 mm	3.19 kN	5	0.73 kg	
DSAHHFR 54GV	4000 mm	3.19 kN	5	0.89 kg	
DSAHHFR 55GV	5000 mm	3.19 kN	5	1.08 kg	
DSAHHFR 510GV	10000 mm	3.19 kN	5	1.88 kg	

Product: Product

length: length

Pmax: Maximum load

Gripple load class: Gripple load class

weight: weight

