


DSAHFSP 3

wire suspension with cross anchor and universal closure

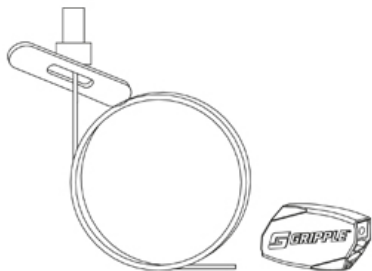

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripple load class	weight
DSAHFSP 31GV	1000 mm	0.88 kN	3	0.08 kg	
DSAHFSP 32GV	2000 mm	0.88 kN	3	0.12 kg	
DSAHFSP 33GV	3000 mm	0.88 kN	3	0.15 kg	
DSAHFSP 34GV	4000 mm	0.88 kN	3	0.20 kg	
DSAHFSP 35GV	5000 mm	0.88 kN	3	0.23 kg	
DSAHFSP 310GV	10000 mm	0.88 kN	3	0.43 kg	

Product: Product

length: length

Pmax: Maximum load

Gripple load class: Gripple load class

weight: weight

