


DSAUGRSP 2

wire suspension with cross anchor and UniGrip central exit

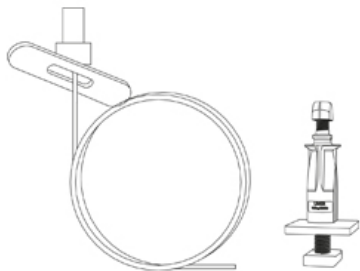

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripping load class	weight
DSAUGRSP 21GV	1000 mm	0.54 kN	2	0.35 kg	
DSAUGRSP 22GV	2000 mm	0.54 kN	2	0.37 kg	
DSAUGRSP 23GV	3000 mm	0.54 kN	2	0.39 kg	
DSAUGRSP 24GV	4000 mm	0.54 kN	2	0.41 kg	
DSAUGRSP 25GV	5000 mm	0.54 kN	2	0.43 kg	
DSAUGRSP 210GV	10000 mm	0.54 kN	2	0.68 kg	

Product: Product

length: length

Pmax: Maximum load

Gripping load class: Gripping load class

weight: weight

