


DSAXPEF8 2

wire suspension with threaded end M8 and express closure

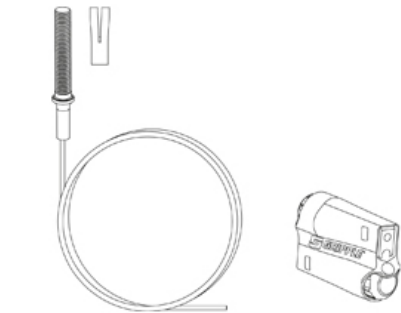

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripple load class	weight
DSAXPEF8 21GV	1000 mm	0.44 kN	2	0.08 kg	
DSAXPEF8 22GV	2000 mm	0.44 kN	2	0.09 kg	
DSAXPEF8 23GV	3000 mm	0.44 kN	2	0.11 kg	
DSAXPEF8 24GV	4000 mm	0.44 kN	2	0.13 kg	
DSAXPEF8 25GV	5000 mm	0.44 kN	2	0.14 kg	
DSAXPEF8 210GV	10000 mm	0.44 kN	2	0.23 kg	

Product: Product
length: length
Pmax: Maximum load
Gripple load class: Gripple load class
weight: weight

