


DSAXPFR 2

wire suspension with loop and express closure

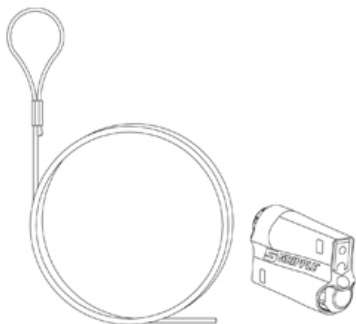

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripple load class	weight
DSAXPFR 21GV	1000 mm	0.44 kN	2	0.05 kg	
DSAXPFR 22GV	2000 mm	0.44 kN	2	0.06 kg	
DSAXPFR 23GV	3000 mm	0.44 kN	2	0.08 kg	
DSAXPFR 24GV	4000 mm	0.44 kN	2	0.10 kg	
DSAXPFR 25GV	5000 mm	0.44 kN	2	0.12 kg	
DSAXPFR 210GV	10000 mm	0.44 kN	2	0.21 kg	

Product: Product
length: length
Pmax: Maximum load
Gripple load class: Gripple load class
weight: weight

