


DSAXPSP 2

wire suspension with cross anchor and express closure

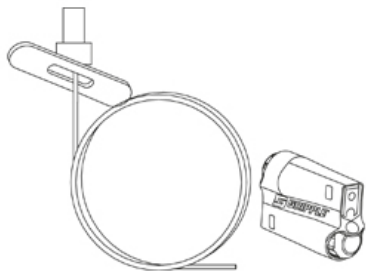

galvanized, according to ISO 4042

Артикул	Product	length	Pmax	Gripple load class	weight
DSAXPSP 21GV	1000 mm	0.44 kN	2	0.05 kg	
DSAXPSP 22GV	2000 mm	0.44 kN	2	0.06 kg	
DSAXPSP 23GV	3000 mm	0.44 kN	2	0.08 kg	
DSAXPSP 24GV	4000 mm	0.44 kN	2	0.10 kg	
DSAXPSP 25GV	5000 mm	0.44 kN	2	0.12 kg	
DSAXPSP 210GV	10000 mm	0.44 kN	2	0.21 kg	

Product: Product

length: length

Pmax: Maximum load

Gripple load class: Gripple load class

weight: weight

