


VM

rod coupling

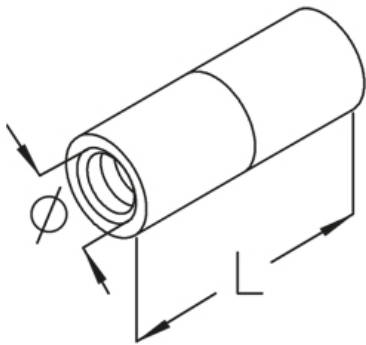

The product can be used for fire protection. For technical parameters, see National Technical Test Certificates (abPs).

galvanized, according to ISO 4042

Артикул	Product	length	diameter	weight
VM M8	30 mm	8 mm	1.10 kg/100	
VM M10	30 mm	10 mm	1.40 kg/100	
VM M12	30 mm	12 mm	1.70 kg/100	

Stainless steel, according to ASTM 304 / BS 304 S 3

Артикул	Product	length	diameter	weight
VM M8E	30 mm	8 mm	1.20 kg/100	
VM M10E	30 mm	10 mm	1.50 kg/100	
VM M12E	30 mm	12 mm	2.40 kg/100	

Product: Product
length: length
diameter: diameter
weight: weight

