


KHZ

Z profile

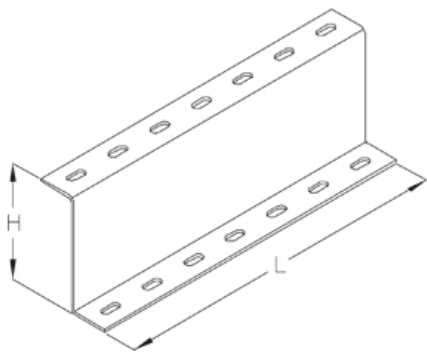

Alternating alignment must be observed while mounting.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	length	t	weight
KHZ 80-01S	80 mm	100 mm	3.00 mm	0.32 kg	
KHZ 80-02S	80 mm	200 mm	3.00 mm	0.65 kg	
KHZ 80-03S	80 mm	300 mm	3.00 mm	0.98 kg	
KHZ 80-04S	80 mm	400 mm	3.00 mm	1.31 kg	
KHZ 80-05S	80 mm	500 mm	3.00 mm	1.64 kg	
KHZ 80-06S	80 mm	600 mm	3.00 mm	1.97 kg	
KHZ 80-30S	80 mm	3000 mm	3.00 mm	9.88 kg	
KHZ 100-01S	100 mm	100 mm	3.00 mm	0.37 kg	
KHZ 100-02S	100 mm	200 mm	3.00 mm	0.74 kg	
KHZ 100-03S	100 mm	300 mm	3.00 mm	1.12 kg	
KHZ 100-04S	100 mm	400 mm	3.00 mm	1.49 kg	
KHZ 100-05S	100 mm	500 mm	3.00 mm	1.86 kg	
KHZ 100-06S	100 mm	600 mm	3.00 mm	2.23 kg	
KHZ 100-30S	100 mm	3000 mm	3.00 mm	11.18 kg	
KHZ 120-01S	120 mm	100 mm	3.00 mm	0.40 kg	
KHZ 120-02S	120 mm	200 mm	3.00 mm	0.90 kg	
KHZ 120-03S	120 mm	300 mm	3.00 mm	1.30 kg	
KHZ 120-04S	120 mm	400 mm	3.00 mm	1.80 kg	
KHZ 120-05S	120 mm	500 mm	3.00 mm	2.20 kg	
KHZ 120-06S	120 mm	600 mm	3.00 mm	2.60 kg	
KHZ 120-30S	120 mm	3000 mm	3.00 mm	13.19 kg	

Product: Product

height: height

length: length

t: material thickness

weight: weight

DETAILS / APPLICATIONS

