


БК 110

floor duct, perforated, height = 110 mm



Floor duct, heavy design, constructed for walk-upon use, with side perforation, including electric conductivity

Pre-embossed slugs in a distance of 100 mm enable an individual assembly e.g. a potential compensation. From a width ≥ 300 mm, use one separating strip. From a width ≥ 500 mm up, use two separating strips. Floor duct side cover on request.

Continuously hot galvanized (Sendzimir process) (DIN EN 10346)

Артикул	Product	height	width	length	t	weight
BK 110-10S	110 mm	100 mm	3000 mm	2.00 mm	15.95 kg	
BK 110-15S	110 mm	150 mm	3000 mm	2.00 mm	18.25 kg	
BK 110-20S	110 mm	200 mm	3000 mm	2.00 mm	20.60 kg	
BK 110-30S	110 mm	300 mm	3000 mm	2.00 mm	25.25 kg	
BK 110-40S	110 mm	400 mm	3000 mm	2.00 mm	29.96 kg	
BK 110-50S	110 mm	500 mm	3000 mm	2.00 mm	34.61 kg	
BK 110-60S	110 mm	600 mm	3000 mm	2.00 mm	39.26 kg	

Product: Product

height: height


width: width

length: length

t: material thickness

weight: weight

DETAILS / APPLICATIONS

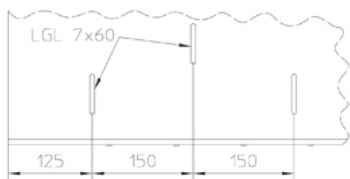



ACCESSORIES

BKRKK 110, BKRKS 110, BKDR, BKD-RHP, BKDR-WZB AL, BKDR-WZB S, BKV 110, BKRT 110, BKZ, BKEB 110, BKHR, BKHC, KHZ, KSB, BKMT,

